



2009 International Catalog

Table of Contents

Product Showcase ————— 3

Multiroom Audio Systems

Collage™ System ————— 4
C-Series System ————— 5
CAV6.6 & CAM6.6 Systems ——— 6-9
CAA Systems ————— 10-11
CAS Systems ————— 12-13
CA4 Systems ————— 14
A-BUS® Systems ————— 15-18

Source Equipment

Smart Media Servers ————— 19
Smart Dual Tuners ————— 20
iBridge Systems ————— 20
Video Distribution ————— 21

Loudspeakers and Amplifiers

Acclaim® Speakers ————— 22-27
Ratio® High-Efficiency Speakers 28-29
Flexbox Back Boxes ————— 29
OutBack Speakers ————— 30
R-Series Amplifiers ————— 31

Impedance Matching

Volume Controls ————— 32-33
Speaker Selectors ————— 34

Intercom Systems

ComPoint® Intercom system — 35-36

IR Systems

SaphIR® systems ————— 37-39

Accessories

PlateMate ————— 40-44
System Accessories ————— 45

Warranty ————— 46



Hello from Russound

As we take stock of what it will take to prosper in the year ahead, we keep our customers in mind as we watch the global economic situation. We've seen a shift toward retrofit solutions as a growing number of consumers are looking at add features to their existing home in lieu of major remodels or new construction.

I am happy to report that Russound is squarely focused on delivering a host of new products that are designed to grow your business in the current economy. From our entry level CA4 controller amplifier, to our new Acclaim loudspeakers, to the innovative and feature rich Collage Powerline Media and Intercom System, every one of our new products are designed to deliver the same easy to install, simple to use customer satisfaction that has driven our business from day one.

Flip through this guide and check out our new products. We've worked hard to organize our products by system size and feature set in a way that makes our guide accessible. While this guide contains a wealth of product information, we know that we couldn't include every detail, so please feel free to give us a call if you have any questions. Don't be shy, we're here to help.

Sincerely,

Charlie Porrith
CEO

Visit our Reseller Portal at:
<http://www.russound.com/portal>

Place and track orders, access transaction history, and view up-to-date business and technical information 24/7.



Russound Collage

The Collage Powerline Media and Intercom system distributes networked accessed music and intercom communication over a home's residential electrical system. Components provide access to two-way transmission of audio, CCTV signals, data, and internet media with metadata feedback without the need of running new zone-to-zone wiring.

For more information on the Collage Powerline Media and Intercom system, please visit: www.russound.com/retroquick.htm, or see page 4



RNET Touchpoint

The Russound RNET Touchpoint allows web enabled touch-screen smartphone users to directly access and control a Russound RNET multizone controller amplifier and its source components. Serving as an access point for an RNET controller amplifier to communicate with a local wireless network, the RNET Touchpoint provides a communication portal for web enabled devices to control an RNET multiroom system through a web browser. See Page 8.



Russound C-Series

Russound's digitally amplified C-Series Multizone Audio system delivers eight audio sources including a built in RDS enabled AM/FM tuner to eight rooms. The keypad's multiline display provides informative source control and advanced features such as source and zone linking, party mode, and sleep timers and alarms.

For more information on C-Series components, please visit: www.russound.com/cseries_system.htm, or see page 5.



Russound Acclaim

Acclaim architectural speakers provide superior sound in any setting. Available in both 5 and 7 series, Acclaim models are offered in a wide range of sizes, applications and acoustic materials. Delivering performance, quality and clarity from models that range from affordable value to discriminating music or home theater enthusiast.

For more information on Acclaim speakers, please visit: www.russound.com/acclaim.htm, or see the selection of Acclaim 5 and 7 Series speakers on pages 22-27.



Double your warranty with Russound Speakers

Install Russound speakers with Russound A-BUS components or Multiroom Controller Amplifiers and double your warranties.

This special offer doubles the original warranties when the products are installed together. The loudspeaker warranty will be doubled from five years to ten years, and the multiroom system component warranty will be doubled from two years to four years against defects and materials.

This program includes Russound Acclaim®, Ratio® OutBack and Universal loudspeakers when combined with A-BUS components or CA4, CAS44, CAA66, CAM6.6, CAV6.6, MCA-C5 or the ACA-E5 Multiroom Controller Amplifiers.

Collage™ Powerline media and intercom system

Collage powerline media and intercom system



Innovative. Intuitive. Affordable.

Retrofit is now *Retroquick*

The Russound Collage power line media and intercom system uses existing electrical wiring to stream music throughout a home. Zones can be installed anywhere near electrical fixtures are located, making retrofit installations a breeze and unobtrusive.

More Choices. No Limits.

Access network attached music, online music services, and communicate between keypads. In addition to a built-in FM tuner, a free 6 month subscription to Rhapsody™ online music service gives you 4 million songs and three independent streams of music.



Russound Collage System Components

4



Collage Amplified Keypad

Features a high-resolution VGA display for viewing system and source information, of feeds from IP CCTV cameras. The capacitive touch buttons and scroll wheel provide easy, intuitive navigation of sources and networked stored music. A built-in microphone allows for zone-to-zone intercom communication and room monitoring. 16 Watts per channel @ 8 Ohms, stable at a 4 Ohm load.

2920-531309: CAK1 White

2920-531316: CAK1 Gray



Collage Remote Control

12 button remote that provides access to Collage system keypad presets and functions, including alarm and sleep timer.

2920-531354: CRC1



Collage Media Manager

Provides the network to host up to 10 Collage Amplified Keypads. It can broadcast up to 3 independent stream of digital music from a local area network or the internet.

2920-531323: CMM1

Russound Collage System Peripherals

Engineered using Gridcast™ technology, the Collage Dock and Source Bridge and their source equipment can be located anywhere in a home where electrical wiring is run.



Collage Source Bridge

The Collage Source Bridge provides an access point for connecting legacy audio and video products to a Collage Powerline Media and Intercom system. Featuring stereo RCA and S/PDIF digital audio inputs, a composite video input, as well as an IR emitter port, the Source Bridge allows for connection and control of CD changers or CCTV video cameras.

Coming Soon




Collage Dock

The Collage Dock allows the integration of an iPod as an audio source within a Collage Powerline Media and Intercom system. The Dock supplies information about the song, artist, album, genre and playlist to the Collage Amplified Keypad screen while keeping the iPod charged and ready to go.

Coming soon

Russound C-Series Multiroom Controller Amplifier System

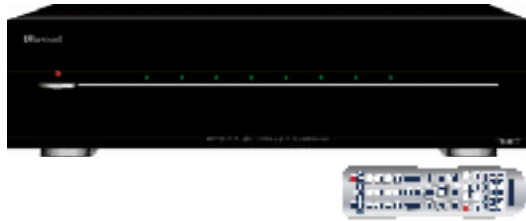

C-Series System


Includes

- (1) MCA-C5 controller
- (6) MDK-C5 system keypads
- (8) 845.1 single emitters
- (1) SRC-C5 Remote control
- (1) AM Antenna
- (1) FM Antenna
- (1) Pair rack ears

1550-531125: KT1-C5
 1550-531149: KT1-C5 EU
 1550-531132: KT1-C5 UK
 Shipping Weight
 38.35 lbs. (17.4 kg)



Russound C-Series Multiroom Controller Amplifier System

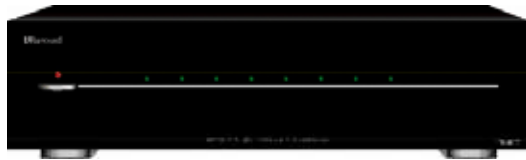

C-Series Multizone Controller Amplifier

(8) Zone/(8) Source Controller Amplifier.

8 zones of audio with adjustable bass/treble/loudness/balance with digital amplifiers providing 40 watts of power per channel to zones one through six, 8 source inputs with loop outputs and fixed or variable line outputs per zone, routed IR, built-in IR learning and a pre-programmed IR library, paging and doorbell muting. Source linking and Zone linking. Front and rear RS-232 serial ports, color-coded detachable 14-gauge snap connectors, eight IR emitters, 12 Volt & home theater triggers. Controllers are rack-mount 2-unit high, and include rack ears.

17"W x 3.5"H x 17.2"D (43.2 x 9 x 43.6 cm)

1550-530913: MCA-C5
 1550-531118: MCA-C5 EU
 1550-531101: MCA-C5 UK
 Shipping Weight 34.55 lbs. (15.68 kg)

C-Series Multi-line Display Keypad



Wall-mounted, standard fit, double-gang keypad for the MCA-C5 Multizone Controller Amplifier. 3" diagonal, high-resolution gray scale LCD screen displays real-time system information. Responsive hard buttons provide easy navigation of sources and content. Adjustable brightness, volume, bass, treble, and balance. Access to source selection and control, party mode, all off, and alarm and sleep timer. RJ45 connection. 4.5"W x 4.5"H (11.43 x 11.43 cm)

1550-530937: MDK-C5
 Shipping Weight 1 lb. (454 g)

C-Series Plasma Friendly Multi-line Display Keypad



Designed for Home Theater applications which use Plasma screens
 4.5"W x 4.5"H (11.43 x 11.43 cm)

1550-530937: MDK-C5P
 Shipping Weight 1 lb. (454 g)

Color Conversion Kit



Includes (1) Decora Trim and
 (1) Keypad Bezel.

1550-531361: White
1550-531378: Almond
1550-531385: Bone
1550-531392: Brown
1550-531408: Black
 Shipping Weight 4 oz. (114 g)



C-Series System Remote

Preprogrammed with IR learning capabilities. Control up to 11 (8 system and 3 local) devices. Backlit keys include sleep button and 2 programmable favorites for fast access or frequently used sources.

1550-530906: SRC-C5
 Shipping Weight 7.4 oz. (210 g)

CAV6.6 & CAM6.6 Systems

CAV6.6 Systems

Russound CAV6.6 and CAM6.6 Controller Amplifier Common Features

6 sources distributed to 6 zones with adjustable bass/treble/loudness/balance (40 Watts per zone), 6 source inputs with variable line outputs, routed IR, built-in IR Learning and a pre-programmed IR library, doorbell muting, power management and macro source control. Rear RS-232 serial ports, color-coded detachable 14-gauge snap connectors, six IR emitters, 12 Volt & home theater triggers. Controllers are rack-mount 2-unit high, and include rack ears..



CAV6.6 with (6) UNO-S2 Keypads

(6) UNO-S2 Keypads, (1) Remote,
(6) 845.1 and (1) Punchdown Tool.

White & Almond Wall plates and rack ears included

1500-528200: CAV6.6-S2
1500-120411: CAV6.6-S2 EU
1500-120435: CAV6.6-S2 UK
Shipping Weight 33 lbs (15 kg)



CAV6.6 6 Zone/6 Source Controller Amplifier with Video

The CAV6.6 includes all the common features of the CAV6.6 and CAM6.6 family of controllers, but adds composite video inputs for all 6 sources, source loop outputs, front panel A/V auxiliary and RS-232 inputs, paging, and 4 A-BUS® ready sub-zones. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1500-119668: CAV6.6
1500-120398: CAV6.6-EU
1500-120404: CAV6.6-UK
Shipping Weight 27 lbs (12.2 kg)



6

CAM6.6 Systems with Satellite Tuner



XM Satellite radio service is available in the UNITED STATES & CANADA ONLY



CAM6.6 with XM Tuner, (5) UNO-S2 and (1) UNO-S1 Keypads

CAM6.6X Controller with (1) System Remote, (1) UNO-S2 Keypad, (5) UNO-S1 Keypads, (6) 845.1 and (1) Punchdown Tool. RG6 to SMB adapter cable.

White & Almond Wall plates and rack ears included

1600-528309: CAM6.6X-S1/S2
Shipping Weight 32 lbs (14.5 kg)



CAM6.6 with XM Tuner and (6) UNO-S2 Keypads

CAM6.6X Controller with (6) UNO-S2 Keypad, (1) System Remote, (6) 845.1 and (1) Punchdown Tool. RG6 to SMB adapter cable.

White & Almond Wall plates and rack ears included

1600-528422: CAM6.6X-S2
Shipping Weight 32 lbs (14.5 kg)



CAM6.6X 6 Zone/6 Source Controller Amplifier with XM Tuner

The CAM6.6X includes all the common features of the CAV6.6 and CAM6.6 family of controllers, with the addition of an internal XM satellite radio tuner. A XM antenna with 20' lead and RG6 to SMB adapter cable are included. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1600-521638: CAM6.6X
Shipping Weight 27 lbs (12.2 kg)



CAM 6.6 Systems with AM/FM Tuner



CAM6.6, AM/FM Tuner and (6) UNO-S2 Keypads

CAM6.6T Controller with (6) UNO-S2 Keypads,
(1) System Remote, (6) 845.1 and (1) Punchdown Tool.
White & Almond Wall plates and rack ears included

1600-528316: CAM6.6T-S2
1600-524325: CAM6.6T-S2 EU
1600-524349: CAM6.6T-S2 UK
Shipping Weight 32 lbs (14.5kg)



CAM6.6, AM/FM Tuner and (6) UNO-S1 Keypads

CAM6.6T Controller with (6) UNO-S1 Keypads,
(1) System Remote, (6) 845.1 and (1) Punchdown Tool.
White & Almond Wall plates and rack ears included

1600-528293: CAM6.6T-S1
1600-521577: CAM6.6T-S1 EU
1600-521553: CAM6.6T-S1 UK
Shipping Weight 32 lbs (14.5kg)



CAM6.6T 6 Zone/6 Source Controller Amplifier with AM/FM Tuner

The CAM6.6T includes all the common features of the CAV6.6 and CAM6.6 family of controllers, with the addition of an internal AM/FM radio tuner. AM and FM antennas are included.
17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1600-521256 : CAM6.6T
1600-521621: CAM6.6T-EU
1600-521614: CAM6.6T-UK
Shipping Weight 27 lbs (12.2kg)



CAM 6.6 Systems without Tuner



CAM6.6 (w/out Tuner) with (6) UNO-S2 Keypads

(1) CAM6.6, (6) UNO-S2 Keypads, (1) Remote, (6) 845.1 and (1) Punchdown Tool.

White & Almond Wall plates and rack ears included

1600-528330: CAM6.6-S2 US
1600-524387: CAM6.6-S2 EU
1600-524400: CAM6.6-S2 UK
Shipping Weight 30 lbs (13.6 kg)



CAM6.6 (w/out Tuner) with (6) UNO-S1 Keypads

(1) CAM6.6, (6) UNO-S1 Keypads, (1) Remote, (6) 845.1 and (1) Punchdown Tool.

White & Almond Wall plates and rack ears included

1600-528323: CAM6.6-S1 US
1600-521812: CAM6.6-S1 EU
1600-521799: CAM6.6-S1 UK
Shipping Weight 32 lbs (14.4 kg)



CAM6.6 6 Zone/6 Source Controller Amplifier without Tuner

The CAM6.6 includes all the common features of the CAV6.6 and CAM6.6 family of controllers.

17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

Rack ears included

1600-521836: CAM6.6 US
1600-521850: CAM6.6-EU
1600-521843: CAM6.6-UK
Shipping Weight 27 lbs (12.2 kg)



CAV6.6 & CAM6.6 Systems

RNET Systems



UNO-S1, Single Gang Keypad

Scrolling 5 character LCD and back lit buttons selectable color (green or amber), custom source names, IR pass-through, 110 Punch-down connector, system status feedback: volume, bass, treble, balance, shared source, party mode, Do Not Disturb, All On, All Off. White & Almond wall plates included 1.3125" W x 1.125" D x 2.5" H (3.3 x 3.2 x 6.35 cm)

2500-528262: White & Almond UNO-S1

Shipping Weight 6 oz (.1 kg)



UNO-S1 Conversion kit

(1) Mounting plate,
(1) Insert Plate,
(1) Cover plate.

2500-528170: White

2500-528187: Almond

2500-528088: Bone

2500-528095: Black

2500-528101: Brown

Shipping Weight 2 oz (.1 kg)



UNO-S2, Double Gang Keypad

Features: Scrolling 12 character LCD and backlit buttons with selectable color (green or amber), custom source names, IR pass-through, 110 Punch-down connector, system status feedback: volume, bass, treble, balance, shared source, party mode, Do Not Disturb, All On, All Off. White & Almond wall plates included 3.65" W x 1.125" D x 4.3" H (9.2 x 10.9 x 2.8 cm)

2500-528255: White & Almond UNO-S2

Shipping Weight 2 lbs (.9 kg)



UNO-S2/K2 Conversion kit

(1) Mounting plate,
(1) Insert Plate,
(1) Cover plate.

2500-528156: White

2500-528163: Almond

2500-528118: Bone

2500-528125: Black

2500-528132: Brown

Shipping Weight 2 oz (.1 kg)

8



UNO-TS2 Touchscreen, In-Wall

Real-time display shows what's playing, with volume level and individualized playlist information right on the touchscreen. High-resolution color LCD 3.75" diagonal touchscreen is easy to read and simple to navigate. Flush design fits neatly in a double-gang box. ***After the first UNO-TS2, each additional UNO-TS2 my require an**

SA-ZX3 keypad splitter. Check Controller specifications.

2500-521171: White UNO-TS2

2500-521973: Almond UNO-TS2

2500-521980: Bone UNO-TS2

2500-521997: Black UNO-TS2

2500-522000: Brown UNO-TS2

Shipping Weight Call



UNO Desktop Touchscreen

Desktop version of the UNO-TS2 wall-mounted touchscreen. 5.92"W x 5.38"D x 4.68"H (15.2 x 13.8 x 12.0 cm)

2500-526718: White UNO-TS2D

2500-526725: Black UNO-TS2D

Shipping Weight 4 lbs.(1.8 kg)



RNET Touchpoint

Allows web enabled touchscreen smartphones to control Russound RNET multizone controller amplifiers. Works with the Russound CAV6.6, CAM6.6, MCA-C5, and ACA-E5 controller amplifiers. A local wireless network and web enabled touchscreen smartphone or device such as an iPhone®, iTouch, Blackberry Storm, or Google Android are required for wireless control.

TCH1

Shipping Weight Call



Avenue® RNET Powerline Carrier Kits



Three Zone-Avenue System with (3) UNO-S2 keypads

Complete 3 zone Avenue system, (3) Avenue Points and (1) Avenue Hub with (3) UNO-S2 keypads.

2910-531453: AVE-KT1
Shipping Weight Call



Three Zone-Avenue System with (2) UNO-S2 keypads and (1) UNO-TS2

Complete 3 zone Avenue system, (3) Avenue Points and (1) Avenue Hub with (3) UNO-S2 keypads.

2910-531460: AVE-KT2
Shipping Weight Call



Three Zone-Avenue System with (3) UNO-TS2 Touchscreens

Complete 3 zone Avenue system, (3) Avenue Points and (1) Avenue Hub with (3) UNO-S2 keypads.

2910-531477: AVE-KT3
Shipping Weight Call

Avenue® RNET Powerline Carrier Components



Avenue Hub

Rack mount, 1-unit high, six audio zone hub, RNET Link in and out. Rack ears included.

2910-527890: AZH-6
Shipping Weight 9 lbs. (4 kg)



Avenue Point

Local zone device, 20 watts per channel RMS @ 8 Ohms, RJ-45 keypad jack, local audio source inputs, line level remote audio source outputs, 4-pole tool-less snap speaker connector.

2910-528514: AZP-20
Shipping Weight 5.6 lbs. (2.52 kg)

Accessories



RNET AV kit

Allows addition of a remote source component to a Russound RNET enabled Controller Amplifier. Encoder and Decoder convey stereo audio, video, and control signals up to 300 feet (90 m) over a single CAT-5e cable. Includes: (1) RAVE1, (1) RAVD1 and (1) power supply.

9590-529399: RAVK1
9590-520265: RAVK1 EU
9590-520272: RAVK1 UK
Ship Weight 5.6 oz (158 g)



UNO Keypad Splitter

Increases power output for connecting up to 3 system keypads to one keypad output on a Russound RNET® Controller Amplifier. Includes (1) RJ-45 input jack, (3) RJ-45 keypad jacks, (1) 1201A 120V power supply.

2500-120497: SA-ZX3 includes Power Supply
2500-120176: SA-ZX3 without Power Supply
Shipping Weight 4 oz. (.11 kg)



System Remote Control

Advanced learning remote control for Russound multiroom systems. Controls up to eight audio-video sources and three local.

1210-524196: SRC2
Ship Weight 1 lb (.45 kg)



PC Power Tool Custom Software

Software for fast, accurate configuration of ST2, CAV6.6 and CAM6.6 systems. Includes: carrying case, software CD, quick start guide, punchdown tool, controller and keypad cables.

1999-520105
Shipping Weight 1 lb (.45 kg)



Programming Cable

Basic programming cable for UNO keypads and touchscreens and Saphir K2 keypads. Female DB-9 connection (PC end) and flat keypad pin connection (keypad end). 72" L (182.9 cm)

2500-121036
Shipping Weight 1 lbs.(0.45 kg)



Advanced Programming Cable

For UNO-S1, KP4, KP6, KPL keypads, ComPoint components and iBridge Dock. Female DB-9 connection (PC end) and flat device pin connection (device end). 72" L (182.9 cm)

2500-521065
Shipping Weight 1 lbs.(0.45 kg)



CAA66 controller with (6) LCD keypads

(6) 845.1 single emitters, punchdown tool, (1) system remote control. (1) CAA66 Controller. (6) Decora® style KPL single-gang keypad has amber backlit LCD panel, source selection, system status indication plus IR pass-through and confirmation. EU and UK kits include wallplates.

17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1210-528347: CAA66L
1210-525582: CAA66L EU
1210-525605: CAA66L UK
Shipping Weight 29 lbs. (13.2 kg)

*EU/UK kits contain screwless wallplates.



CAA66 controller with (6) KP6 system keypads

(6) 845.1 single emitters, punchdown tool, (1) system remote control. Features: (1) CAA66 Controller. (6) Decora® style KP6 single-gang keypad has amber backlit buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1210-528354: CAA66K
1210-525674: CAA66K EU
1210-525681: CAA66K UK
Shipping Weight 29 lbs. (13.2 kg)

*EU/UK kits contain screwless wallplates.



Controller Amplifier: Advanced 6 source/6 zone

CAA66 Features: (6) Six zones (40 Watts per zone) Front panel programming center, built-in IR learning, rear RS-232 serial port, extensive built-in IR library, controller link in and out, color-coded detachable 14-gauge snap connectors, rack-mount 2-unit high. (6) IR Emitters, Controller Only, No keypads. Rack ears included. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1210-524882: CAA66 US

1210-525827: CAA66 EU

1210-525834: CAA66 UK

Shipping Weight 23 lbs. (10.4 kg)



LCD Keypad for CAA66/CAS44 Systems

In-wall Decora® style single-gang keypad features backlit LCD panel, amber backlit soft-touch buttons, custom source names, IR pass-through, 110 punchdown connector, system status feedback, user adjustable zone bass, treble, loudness and balance.

1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm) **Wall plates not included.**

1210-528385: White & Almond KPL

Shipping Weight 4.5 oz. (127.6 g)



Color Conversion Kit for KPL

Includes (6) Decora® inserts.

1210-525100: White

1210-525117: Almond

1210-525124: Bone

1210-525131: Black

1210-525148: Brown

Shipping Weight 2oz (.1kg)



System Keypad for CAA66 System

In-wall Decora® style single-gang keypad features amber backlit soft-touch buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 110 punchdown connector, installer adjustable zone bass, treble, loudness and balance.

1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm) **Wall plates not included.**

1210-528392: White & Almond KP6

Shipping Weight 4.0 oz. (113 g)



Color Conversion Kit for KP6

Includes (6) Decora® inserts.

1210-525209: White

1210-525216: Almond

1210-525223: Bone

1210-525230: Black

1210-525247: Brown

Shipping Weight 2oz (.1kg)



Source Control Keypad Optional Keypad for KP6 or KPL Keypad:

NOT A STAND ALONE KEYPAD

In-wall Decora® style single-gang keypad accessory adds source control and numeric control capability to KP6 and KPL keypads. Amber backlit soft-touch buttons.

(1.85"W x 2.7"D x 1"H (4.7 x 6.9 x 2.5 cm) **Wall plates not included.** *Not compatible with CAS44

1210-528415: KPSC

Shipping Weight 3 oz. (85 g)



Color Conversion Kit for KPSC

Includes (6) Decora® inserts.

1210-525452: White

1210-525469: Almond

1210-525476: Bone

1210-525483: Black

1210-525490: Brown

Shipping Weight 2oz (.1kg)



CAA System Remote Control

The SRC1 Remote Control is designed for use with Russound controllers and keypads in CAA66, CAM6.6, CAV6.6 and RNET® systems. The SRC1 is a system remote only and does not support learning IR codes.

1210-524127: SRC1

Shipping Weight 4 oz. (113 g)



Complete CAS44 System with (4) LCD Keypads

CAS44 controller with 4 KPL LCD keypads, (2) 1584.1 dual emitters, rack ears, punchdown tool, (1) learning/preprogrammed system remote control, (1) IR link cable. Features: (4) zones (40W per zone), (4) audio source inputs, (2) common IR outputs, mute 12V trigger in, 12V trigger out, rear RS-232 serial port, color-coded detachable 14 gauge snap connectors and rack-mount 2U high (rack ears included). Decora® style KPL single-gang keypad has amber backlit LCD, source selection, system status indication plus IR pass-through and confirmation.

17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

White & Almond wall plates included

1210-528361: CAS44L

1210-525711: CAS44L EU

1210-525728: CAS44L UK

Shipping Weight 27 lbs. (12.2 kg)

*EU/UK kits contain screwless wallplates.



Complete CAS44 System with (4) System Keypads

CAS44 controller with (4) KP4 system keypads, (2) 1584.1 dual emitters, rack ears, punchdown tool, (1) CAS-RC learning/preprogrammed system remote control, (1) IR link cable. Features: (4) zones (40W per zone), (4) audio source inputs, (2) common IR outputs, mute 12V trigger in, 12V trigger out, rear RS-232 serial port, color-coded detachable 14 gauge snap connectors and rack-mount 2U high (rack ears included). Decora® style KP4 single-gang keypad has amber backlit buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

White & Almond wall plates included

1210-528378: CAS44K US

1210-525780: CAS44K EU

1210-525797: CAS44K UK

Shipping Weight 27 lbs. (12.2 kg)

*EU/UK kits contain screwless wallplates.



Controller Amplifier: Simple 4 source/4 zone

CAS44: (4) four zones (40 Watts per zone) and rear RS-232 serial ports, color-coded detachable 14-gauge snap connectors and rack-mount 2-unit high. (2) 1584.1 Dual head IR emitter, Controller Only, No keypads. Rack ears included. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1210-524899: CAS44 US
1500-525841: CAS44 EU
1500-525858: CAS44 UK
 Shipping Weight 23 lbs. (10.4 kg)



Advanced Programming Cable

Advanced programming cable for UNO-S1, KP4, KP6, KPL keypads, ComPoint components (ISK1, ISK2, ISK3, ISH1), and iBridge Dock. Female DB-9 connection (PC end) and flat device pin connection (device end). 72" L (182.9 cm)

2500-521065
 Shipping Weight 1 lbs. (0.45 kg)



LCD Keypad for CAA66 and CAS44 Systems

In-wall Decora® style single-gang keypad features backlit LCD panel, amber backlit soft-touch buttons, custom source names, IR pass-through, 110 punchdown connector, system status feedback, user adjustable zone bass, treble, loudness and balance. 1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm)

Wall plates not included.

1210-528385: White & Almond KPL
 Shipping Weight 4.5 oz. (127.6 g)



Color Conversion Kit for KPL

Includes (6) Decora® inserts.

1210-525100: White
1210-525117: Almond
1210-525124: Bone
1210-525131: Black
1210-525148: Brown
 Shipping Weight 2oz (.1kg)



System Keypad for CAS44 Systems

In-wall Decora® style single-gang keypad features amber backlit soft-touch buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 110 punchdown connector, installer adjustable zone bass, treble, loudness and balance. 1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm)

Wall plates not included.

1210-528408: White & Almond KP4
 Shipping Weight 4.0 oz. (113 g)



Color conversion kit for KP4

Includes (4) Decora® inserts.

1210-525254: White
1210-525261: Almond
1210-525278: Bone
1210-525285: Black
1210-525292: Brown
 Shipping Weight 2oz (.1kg)




CAS44 System Remote Control

The CAS-RC Remote Control is designed for use with the Russound CAS44 controller amplifier and system keypads (KP6, KP4, and KPL). It is designed to operate source devices and the audio system keypad, and is preprogrammed to control Russound components ST2 Tuner and SMS3 Media Server. The CAS-RC controls up to four devices.

1210-524134: CAS-RC
 Shipping Weight 4.0 oz. (113 g)

CA4 Systems

Russound CA4 Multiroom Controller Amplifier Kit

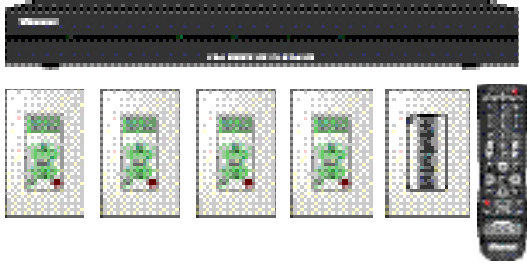

CA4 Multiroom Kit

Kit includes

- (1) CA4 controller
- (4) CA4-KP system keypads
- (4) 845.1 single emitters
- (1) CA4-RC System remote
- (1) Pair rack ears

1200-530418: CA4-KT1


1200-530425: CA4-KT1-EU*

1200-530432: CA4-KT1-UK*

Shipping Weight Call

*EU/UK kits contain screwless wallplates.

Russound CA4 Multiroom Controller Amplifier System Components



CA4 Multizone Controller

4 source/4 zone Rack mount, 1-unit high, (4) four zones (30 Watts per zone), rear RS-232 port, RJ-45 expander jack, (4) 845.1 single emitters. Controller only, no keypads. Rack ears included.

1200-529689: CA4

1200-530449: CA4-EU

1200-530456: CA4-UK

Shipping Weight Call

14



CA4 Wall Port

Single-gang, in-wall port for connection of a CA4 Multizone Controller to four system zone keypads and speakers. (4) RJ-45 inputs, (4) RJ-45 outputs, (4) speaker terminal pairs.

Wall plates not included.

1200-529719: CA4-WP

Shipping Weight Call



CA4 System Keypad

Single-gang, in-wall Decora® style keypad for control of a CA4 Multizone audio system. (1) RJ-45 connection.

Wall plates not included.

1200-529696: CA4-KP

Shipping Weight Call



Color Conversion Kit for CA4-KP

Includes (6) Decora® inserts.

1200-531057: White

1200-531064: Almond

1200-531095: Bone

1200-531071: Black

1200-531088: Brown

Shipping Weight 2oz (.1kg)



CA4 System Remote Control

Advanced IR learning and pre-programmed remote control for CA4 Multizone Controller. It is designed to operate source devices and the CA4 Multizone audio system keypads. Controls up to four devices.

1200-529702: CA4-RC

Shipping Weight Call

Russound A-BUS Multisource Kits



Six-Source/Eight-Zone Controller Kit
 (1) A-C68 Multizone Controller
 (6) A-K5L Amplified LCD Keypads
 (1) A-SRC1 System Remote
 (6) 845.1 IR Emitter

2000-527661: A-C560
 2000-529733: A-C560-EU*
 2000-529740: A-C560-UK*

*EU/UK kits contain screwless wallplates.



Four-Source/Four-Zone Kit with Local Source Input
 (1) A-H484 Multisource Multizone Hub
 (4) A-K3 Amplified Keypads
 (1) A-LRC2 Learning Remote
 (1) A-LC3 Local Source Input
 (4) 845.1 IR Emitter
 (1) A-PS Power Supply

2000-527678: A-M341
 2000-529757: A-M341-EU*
 2000-529764: A-M341-UK*

*EU/UK kits contain screwless wallplates



Four-Source/Four-Zone Kit (International only)
 (1) A-H484 Multisource Multizone Hub
 (4) A-KP- EU Amplified Keypads
 (1) A-LRC2 Learning Remote
 (4) 845.1 IR Emitter
 (1) A-PS Power Supply

2000-529771: A-ME40-EU
 2000-529788: A-ME40-UK

*EU/UK kits contain screwless wallplates

Russound A-BUS Decora Style, Single-Source Kits



Decora Style (In-wall) Single-Source/Two-Zone Kit
 (1) A-H4D In-wall Hub
 (2) A-VC2 Ampl. Volume Controls
 (1) A-PS Power Supply
 (1) Punchdown Tool

2000-527753: A-D120
 2000-529924: A-D120-EU
 2000-529931: A-D120-UK

*EU/UK kits contain screwless wallplates.



Decora Style (In-wall) Single-Source/Two-zone Kit with Remote Control
 (1) A-H4D In-wall Hub
 (2) A-K3 Amplified Keypads
 (1) A-LRC2 Learning Remote
 (1) 1584.1 Dual IR Emitter
 (1) A-PS Power Supply
 (1) Punchdown Tool

2000-527760: A-D320
 2000-529948: A-D320-EU
 2000-529955: A-D320-UK

*EU/UK kits contain screwless wallplates.



Decora style (in-wall) Single-Source/Four-Zone Kit with Remote Control
 (1) A-H4D In-wall Hub
 (4) A-K3 Amplified Keypads
 (1) A-LRC2 Learning Remote
 (1) 1584.1 Dual IR Emitter
 (1) A-PS Power Supply
 (1) Punchdown Tool

2000-527784: A-D340
 2000-529986: A-D340-EU
 2000-529993: A-D340-UK

*EU/UK kits contain screwless wallplates.



Decora style (in-wall) Single-Source/Four-Zone Kit with Remote Control and Local Source Input
 (1) A-H4D In-wall Hub
 (4) A-K3 Amplified Keypads
 (1) A-LRC2 Learning Remote
 (1) A-LC3 Local Source Input
 (1) 1584.1 Dual IR Emitter
 (1) A-PS Power Supply
 (1) Punchdown Tool

2000-527791: A-D341
 2000-530005: A-D341-EU
 2000-530012: A-D341-UK

*EU/UK kits contain screwless wallplates.



Decora Style (in-wall) Two-Zone Expansion Kit (for A-H4D)

- (1) A-H4Dx Expansion Hub
- (2) A-K3 Amplified Keypads
- (1) A-PS Power Supply

2000-527838: A-X320

- 2000-530081: A-X320-EU
- 2000-530098: A-X320-UK

*EU/UK kits contain screwless wallplates.



Decora Style (in-wall) Four-Zone Expansion Kit (for A-H4D)

- (1) A-H4Dx Expansion Hub
- (4) A-K3 Amplified Keypads
- (1) A-PS Power Supply
- (1) Punchdown Tool

2000-527845: A-X340

- 2000-530104: A-X340-EU
- 2000-530111: A-X340-UK

*EU/UK kits contain screwless wallplates.

Russound A-BUS Structured Wiring, Single-Source Kits (International ONLY)



Single-Source/Four-Zone Kit with Remote Control (International only)

- (1) A-H4 Surface Mount Hub
- (4) A-KP-EU Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-530524: A-SE40-EU*

2000-530517: A-SE40-UK*



Single-Source/Four-Zone Kit with Remote Control and Local Source Input (International only)

- (1) A-H4 Surface Mount Hub
- (4) A-KP-EU Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) A-LC3 Local Source Input
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-529900: A-SE41-EU*

2000-529917: A-SE41-UK*

Russound A-BUS Structured Wiring, Single-Source Kits



Single-Source/Two-Zone Kit with Remote Control

- (1) A-H2 Surface Mount Hub
- (2) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-527708: A-S320

- 2000-529825: A-S320-EU
- 2000-529832: A-S320-UK

*EU/UK kits contain screwless wallplates.



Single-Source/Four-Zone Kit with Remote Control

- (1) A-H4 Surface Mount Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-527722: A-S340

- 2000-529863: A-S340-EU
- 2000-529870: A-S340-UK

*EU/UK kits contain screwless wallplates.



Single-Source/Four-Zone Kit with Remote Control and Local Source Input

- (1) A-H4 Surface Mount Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) A-LC3 Local Source Input
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-527739: A-S341

- 2000-529887: A-S341-EU
- 2000-529894: A-S341-UK

*EU/UK kits contain screwless wallplates.

Russound A-BUS Remote Input, Single-Source Kits



Remote Source, Single-Source/Two-Zone Kit with Remote Control

- (1) A-H1 Audio Interface Hub
- (1) A-H4P Surface Mount Hub
- (2) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply
- (1) Punchdown Tool

- 2000-527807: A-R320**
- 2000-530029: A-R320-EU
- 2000-530036: A-R320-UK

*EU/UK kits contain screwless wallplates.



Remote Source, Single-Source/Four-Zone Kit with Remote Control

- (1) A-H1 Audio Interface Hub
- (1) A-H4P Surface Mount Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply
- (1) Punchdown Tool

- 2000-527814: A-R340**
- 2000-530043: A-R340-EU
- 2000-530050: A-R340-UK

*EU/UK kits contain screwless wallplates.



Remote Source, Single-Source/Four-Zone Kit with Remote and Local Source Input

- (1) A-H1 Audio Interface Hub
- (1) A-H4P Surface Mount Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) A-LC3 Local Source Input
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply
- (1) Punchdown Tool

- 2000-527821: A-R341**
- 2000-530067: A-R341-EU
- 2000-530074: A-R341-UK

*EU/UK kits contain screwless wallplates.

Russound A-BUS Multi-source Controller and Hub



6 source/8 zone multizone controller.

Rack mount, 1-unit high, rear RS-232 port, (2) RJ-45 expander jacks, (6) 845.1 single emitters. IR library, learning and paging. Controller only, no keypads. Rack ears included.

2000-527432: A-C68



Four Room Four Source Surface Mount Hub

4 Pairs of gold plated audio RCA jacks, (4) Routed IR emitter jacks, (1) Common IR Jack, (8) RJ-45 keypad connectors, (1) 12 Volt trigger output, (2) Power supply jacks. 6.5" W x 5" H x 1.5" D (165 x 127 x 38 mm)

2000-115882: A-H484

Shipping Weight 2.25 lbs (.5kg)



Russound A-BUS Single Source



Two Zone Single Source Surface Mount Hub

Gold plated audio input RCA jacks, (4) IR emitter jacks, (2) RJ-45 keypad connectors, (1) Expansion input, IR confirmation LED. 6.5" W x 2" H x 1.5" D (165 x 51 x 38 mm)

2000-115837: A-H2

Shipping Weight 7 oz. (198 g)



Four Zone Single Source Surface Mount Hub

Gold plated audio input/output RCA jacks, (4) IR emitter jacks, (4) RJ-45 keypad connectors, RJ-45 IR link input and output, IR confirmation LED. Requires A-PS power supply. 6.5" W x 3" H x 1.225" D (165 x 76 x 32 mm)

2000-115851: A-H4

Russound A-BUS Remote Source Components



Single-input A-BUS Audio Interface

Uses standard RJ45 jack. Supports A-BUS hubs like the A-H4P, A-H4. IR emitter outputs for source control. 6.5" W x 3" H x 1.225" D (165 x 76 x 32 mm)

2000-121845: A-H1

Shipping Weight 7 oz. (198 g)



Four Zone Hub Panel Four room

Single input structured wiring A-BUS Audio Distribution Hub. Requires A-BUS ready source or A-H1 Audio Interface Hub. Uses 110 punchdown connectors and CAT-5 for easy hookup. Requires A-PS power supply. 6.5" W x 3" H x 1.25" D (165 x 76 x 32 mm)

2000-121852: A-H4P

Shipping Weight 8 oz. (226 g)



In-wall, 4 Zones Single Source Hub

Fits in a standard double gang work box. Gold plated audio input and output RCA jacks, (4) IR emitter jacks, 110 punchdown terminals, 24 VDC power and 12 VDC status jacks. **Wall plates not included** 3.625" W x 4.125" H x 1.125" D (9.2 x 10.5 x 4.8 cm)

2000-116025: White A-H4D

2000-116049: Almond A-H4D

2000-117831: Bone A-H4D

2000-116056: Black A-H4D

2000-117855: Brown A-H4D



Expansion Hub

Plugs into existing A-H4D hub for 4 additional zones. Requires A-PS and A-H4D. Installation requires a three-gang work box.

*Wall plates not included with keypads.

6.5" W x 3" H x 1.225" D (165 x 76 x 32 mm)

2000-116063 White A-H4DX

2000-116087 Almond A-H4DX

2000-117893 Bone A-H4DX

2000-117909 Black A-H4DX

2000-117916 Brown A-H4DX

Shipping Weight 1 lbs (.5kg)

Russound A-BUS Decora Style Components



A-BUS Amplified LCD Keypad

A-BUS amplified keypad with LCD panel and IR receiver, tone control, pre-amp output, up to 12-source selection, RJ-45 connector to controller, for use with A-C68.

Wall plates not included.

2000-527654: **Wht/Alm. A-K5L**
 2000-528705: **Bone A-K5L**
 2000-528729: **Brown A-K5L**
 2000-528712: **Black A-K5L**



A-BUS Source Control Keypad

A-BUS source control keypad, 11-button keypad connects to A-K5L to add numeric and transport control of sources, for use with A-K5L and A-C68.

Wall plates not included.

2000-527463: **Wht/Alm. A-KSC**
 2000-528804: **Bone A-KSC**
 2000-528828: **Brown A-KSC**
 2000-528811: **Black A-KSC**



A-BUS Amplified Keypad

A-BUS amplified keypad with IR receiver, pre-amp outputs, left and right gain controls with RJ-45 connector. **Wall plates not included.**

2000-527449: **Wht/Alm. A-K3**
 2000-528651: **Bone A-K3**
 2000-528675: **Brown A-K3**
 2000-528668: **Black A-K3**



A-BUS Amplified Volume Control

Features system status indicator, pre-amp outputs, L&R channel gain controls with 110 punchdown termination. **Do not use with multi-source A-BUS Controller or Hub.**

1.3125" W x 2.5" H x 1.5" D
 (33.5 x 63.5 x 38.5 mm)
 2000-528217: **Wht/Alm. A-VC2**
 2000-521201: **Bone A-VC2**
 2000-521188: **Brown A-VC2**
 2000-521218: **Black A-VC2**
 Shipping Weight 5oz (.1kg)



A-BUS Amplified Keypad, Euro Style

45x45mm Euro style with IR, pre-amp outputs, L&R channel gain controls, backlit, volume and status indicators, source selection when used with the A-H484 Multi-Source Hub, fits in a 48mm wall box. **Wall plates not included.**

2000-118838: **White A-KP EU**
 2000-118821: **Black A-KP EU**



A-BUS Local Source Input

A-BUS local source input with IR emitter for local source control, auto sensing to override audio, wires between hub or controller and keypad.

Wall plates not included.

2000-527456: **Wht/Alm. A-LC3**
 2000-118579: **Bone A-LC3**
 2000-118593: **Brown A-LC3**
 2000-118586: **Black A-LC3**



Color conversion kits for in-wall hubs

(1) Decora Audio Plate, (1) Decora® IR Plate, (1) A-H4Dx Decora Plate.

2000-521928: **White A-H4D CONV**
 2000-118739: **Almond A-H4D CONV**
 2000-118708: **Bone A-H4D CONV**
 2000-118722: **Black A-H4D CONV**
 2000-118715: **Brown A-H4D CONV**
 Shipping Weight 2oz (.1kg)



A-BUS System Remote Control (for A-C68)

A-BUS system remote control for A-C68, features source selection and control for up to six system sources and one local source.

2000-526749: **A-SRC1**



A-BUS Learning Remote Control

Learning/pre-programmed remote control. Features source selection and control for up to seven devices and A-BUS system keypads. Pre-programmed with most major brands of audio and video equipment, can learn IR commands, works well as a standalone home theater remote.

2000-526732: **A-LRC2**



A-BUS Line Level Output Module

Provides a fixed-level stereo line output from an A-BUS hub keypad port or other A-BUS-ready multiroom controller to an external amplifier or receiver. RJ45 CAT-5 cable connection, RCA jacks for left-right audio, IR receiver input terminals. 3.33" W x 2.38" H x 1.59" D (8.4 x 6.0 x 4.0 cm)

2000-526473: **A-OM**
 Ship Weight 5.6 oz (158 g)



A-BUS® Power Supply

24 Volt DC. Features: Autosensing 110/220 voltage, detachable power cord, compact size.
 6.5" W x 2.75" H x 3.75" D (165.5 x 70 x 95.5 mm)

2000-113833: **A-PS US**
 2000-114557: **A-PS-EU**
 2000-114847: **A-PS-UK**
 Shipping Weight 1.25 lbs (.57 kg)

Russound Smart Media Servers



Smart Media Server 250

Three independent music streams, 250GB hard drive for nearly unlimited storage, CD-ROM drive for loading music. Supports TV or monitor display, web based user interface, and IR remote control. Delivers title, artist, song list and cover art support to RNET controller amplifiers, keypads and touchscreens through RNET link. Includes: (1) SMS3-250 Media Server, (1) SMS3-RC Remote Control, (3) RCA cables, (1) Composite Video cable, Pair rack-mount ears, power supply. Rack-mountable 1u high. 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2420-523809: SMS3-250 US
 2420-524103: SMS3-250-EU
 2420-524097: SMS3-250-UK
 Shipping Weight 22.7 lbs (10.3 kg)



Smart Media Server 160

Three independent music streams, 160GB hard drive for nearly unlimited storage, CD-ROM drive for loading music. Supports TV or monitor display, web based user interface, and IR remote control. Delivers title, artist, song list and cover art support to RNET controller amplifiers, keypads and touchscreens through RNET link. Includes: (1) SMS3-160 Media Server, (1) SMS3-RC Remote Control, (3) RCA cables, (1) Composite Video cable, Pair rack-mount ears, power supply. Rack-mountable at 1U high." 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2420-521089: SMS3 160-US
 2420-521690: SMS3 160-EU
 2420-521706: SMS3 160-UK
 Shipping Weight 22.7 lbs (10.3 kg)

Russound Smart Dual Tuners



ST2 Smart Tuner

Dual AM/FM tuner. Can be used in an IR-controlled, A-BUS or RNET-enabled system. Stores up to 72 station presets with custom naming. Includes AM and FM antennas (2 each), RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. Rack-mountable at 1 unit high. 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-121906: ST2 US
 2410-520129: ST2-EU
 2410-520143: ST2-UK
 Shipping Weight 10.5 lbs (4.7 kg)



ST2-KP

The ST2-KP Smart Tuner keypad allows you to view Station feedback and lets you select your favorite preset station in any non-RNET system where a tuner display and control is desired. *Wall plates not included with keypads. 1.3125" W x 2.5" H x 1.375" D (33.5 x 63.5 x 35 mm)

2410-520846: White
2410-520853: Almond
2410-520860: Bone
2410-520884: Black
2410-520877: Brown
 Shipping Weight 3oz (.1 kg)

Source equipment

Russound Smart Dual Tuners with Satellite Radio



Satellite radio service is available in the UNITED STATES & CANADA ONLY



- Over 150 channels of Music
- News, talk, sports and traffic
- Digital quality audio
- Coast-to-coast coverage



Smart Dual Tuner with XM

1 AM/FM tuner and 1 XM tuner. Seek and scan functions. Stores up to 72 station presets with custom naming. Includes AM and FM antennas, XM antenna, RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. RG6 to SMB adapter cable. Rack-mountable at 1 unit high. 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-521072: ST2-XM
Shipping Weight 9.9 lbs (4.5 kg)



- Over 150 channels of Music
- News, talk, sports and traffic
- Digital quality audio
- Coast-to-coast coverage



Smart Dual XM Tuner

2 XM tuners. Seek and scan functions. Stores up to 72 station presets with custom naming. Includes (2) XM antennas, RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. Rack-mountable at 1 unit high. RG6 to SMB adapter cable. 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-522017: ST2-XM2 US
Shipping Weight 10.25 lbs (4.65kg)



- 100% commercial free Music
- Over 120 channels of music, news, talk, sports and traffic



Smart Dual Tuner with Sirius

1 AM/FM tuner and 1 SIRIUS tuner. SIRIUS antenna, RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. Rack-mountable at 1U. RG6 to SMB adapter cable. 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-524462: ST2-S
Shipping Weight 10.5 lbs (4.8kg)

20

Russound iBridge Systems



iBridge Dock Kit

Allows you to use an iPod as a remote source for a Russound RNET or other multiroom audio-video system. Used with a Russound RNET A/V Decoder, it provides either RNET or infrared (IR) control of the iPod, depending on the type of system.

2430-526541: BGK1
2430-526589: BGK1 EU
2430-526596: BGK1 UK
Shipping Weight 3.7 lbs (1.7 kg)



iBridge Bay Kit

The complete solution for integrating iTunes® media from a Intel® Core Duo Mac® desktop or MacBook® with an RNET® multiroom system. Kit includes: (1) BGB2 iBridge Bay, (1) RAVD1 RNET A/V Decoder, (1) 12 VDC 1A power supply, (2) RJ-45 patch cables, (1) USB cable, (1) composite video cable, (1) stereo mini patch cable, (1) stereo RCA patch cable

2430-527005: BGK2
2430-527371: BGK2 EU
2430-527388: BGK2 UK
Shipping Weight 3.5 lbs (1.6 kg)



iBridge Power Dock Kit

Allows the retrofit of an iPod as a remote source for a Russound RNET multiroom audio-video system. Using RNET Power Line Carrier (PLC) technology, the Power Dock kit transmits audio, control, and metadata signals over residential 110V power lines. Kit includes: (1) BGD2 iBridge Power Dock, (1) BGDA Dock Adapter, (1) BGCA Controller Adapter, (1) power cord, (5) iPod well adapters, (1) RJ-45 patch cable.

2430-530180: BGK3
Shipping Weight 3.7 lbs (1.7 kg)

Video



HDMI Extender

Routes 1080p high-definition video, surround audio and IR pass-through signals to distances of up to 300 feet using a single CAT-5e cable. The kit supports HDMI v1.2 and is High-bandwidth Digital Content Protection (HDCP) compliant.

9590-531156: HDMIX
9590-531781: HDMIX EU
9590-531798: HDMIX UK
 Shipping Weight 1.25 lbs. (.68 kg)



Active Component Video Balun Kit

Send component video over CAT-5 up to 500 feet point-to-point. Includes the HDTX, HDRX and 12VDC 200mA power supply.

Not for sale in countries with CE requirements
9590-526220: VBHD Kit
 Shipping Weight 1.25 lbs. (.68 kg)



Active Composite Audio-Video Balun Kit

Send composite video and audio over CAT-5 up to 1000 feet point to point. Includes the CTX, CRX and 12VDC 200mA power supply.

Not for sale in countries with CE requirements
9590-526237: VBC Kit
 Shipping Weight 1.25 lbs. (.68 kg)



Composite Video Connector

Premium gold plated RCA. Converts composite video signal from RCA to CAT-5 cable. Sold in pairs.

7103-121876: MOD-VB
 Shipping Weight 2 oz (.05g)

HD Video Matrix for RNET: 4 Zone Systems



Video Matrix 4 zone kit

Four source, four zone high-definition Video Matrix system. PAL, RNET and RS-232 control capable. Includes: (1) 4x4 matrix (VM1), (1) power supply (A-PS) and 4 video receivers (VMR1)

EU & UK include Wall plates.
2210-527043: VM1-4
2210-527494: VM1-4 EU
2210-527500: VM1-4 UK
 Shipping Weight 25 lbs. (11.3 kg)



Video Matrix 4 zone kit with 2 zone up-conversion

Four source, four zone high-definition Video Matrix system. Up-conversion on two sources. PAL, RNET and RS-232 control capable. Includes: (1) 4x4 matrix (VM1), (1) power supply (A-PS) and (4) video receivers (VMR1)

EU & UK include Wall plates.
2210-527050: VM1-4UC
2210-527517: VM1-4UC EU
2210-527524: VM1-4UC UK
 Shipping Weight 25 lbs. (11.3 kg)

HD Video Matrix for RNET: 8 Zone Systems



Video Matrix 8 zone kit

Eight source, eight zone high-definition Video Matrix system. PAL, RNET and RS-232 control capable. Includes: (1) 8x8 matrix (VM1), (1) power supply (A-PS) and (8) video receivers (VMR1)

EU & UK include Wall plates.
2210-527067: VM1-8
2210-527531: VM1-8 EU
2210-527548: VM1-8 UK
 Shipping Weight 25 lbs. (11.3 kg)



Video Matrix 8 zone kit with 2 zone up-conversion

Eight source, eight zone high-definition Video Matrix system. Up-conversion on two sources. PAL, RNET and RS-232 control capable. Includes: (1) 8x8 matrix (VM1), (1) power supply (APS) and (8) video receivers (VMR1)

EU & UK include Wall plates.
2210-527074: VM1-8UC
2210-527555: VM1-8UC EU
2210-527562: VM1-8UC UK
 Shipping Weight 25 lbs. (11.3 kg)



Video Matrix 8 zone kit with 4 zone up-conversion

Eight source, eight zone high-definition Video Matrix system. Up-conversion on four sources. PAL, RNET and RS-232 control capable. Includes: (1) 8x8 matrix (VM1), (1) power supply (APS) and (8) video receivers (VMR1)

EU & UK include Wall plates.
2210-527081: VM1-8UC2
2210-527579: VM1-8UC2 EU
2210-527586: VM1-8UC2 UK
 Shipping Weight 25 lbs. (11.3 kg)



Acclaim 5 Series 5.25" In-Ceiling Single Point Stereo, 75 watts

In-ceiling Single Point Stereo speaker
5.25" formed polypropylene woofer with two 0.5" pivoting PEI tweeters,
power handling from 10 – 75 watts total at 6 ohms per channel.

3165-530586 :5C51S



Acclaim 5 Series 6.5" In-Ceiling Single Point Stereo, 75 watts

In-ceiling Single Point Stereo speaker
6.5" vacuum formed polypropylene woofer with two 0.5" pivoting PEI tweeters,
power handling from 10 – 75 watts total at 6 ohms per channel

3165-530609: 5C61S



Acclaim 5 Series 6.5" In-Ceiling Single Point Stereo, 100 watts

In-ceiling Single Point Stereo speaker
6.5" injection molded polypropylene and Kevlar woofer with two 0.5" pivoting silk tweeters, power
handling from 10 – 100 watts total at 6 ohms per channel.

3165-530623: 5C64S



Acclaim 5 Series 8" In-Ceiling Single Point Stereo, 150 watts

In-ceiling Single Point Stereo speaker 8.0" aluminum woofer with two 1.0" pivoting titanium tweeters,
power handling from 10 – 150 watts total at 6 ohms per channel

3165-530661: 5C85S



Acclaim 5 Series 5.25" In-Ceiling, 75 watts

2-way in-ceiling speaker pair
5.25" vacuum formed polypropylene woofer with a 0.5" pivoting PEI tweeter,
power handling from 10 – 75 watts at 8 ohms

3165-530579: 5C51



Acclaim 5 Series 6.5" In-Ceiling, 75 watts

2-way in-ceiling speaker pair
6.5" vacuum formed polypropylene woofer with a 0.5" pivoting PEI tweeter,
power handling from 10 – 75 watts at 8 ohms

3165-530593: 5C61



Acclaim 5 Series 6.5" In-Ceiling, 85 watts

2-way in-ceiling speaker pair
6.5" vacuum formed polypropylene woofer with a 1.0" pivoting silk tweeter,
power handling from 10 – 85 watts at 8 ohms

3165-530616: 5C62



Acclaim 5 Series 8" In-Ceiling, 125 watts

2-way in-ceiling speaker pair
8.0" vacuum formed polypropylene woofer with a 1.0" pivoting silk tweeter,
power handling from 10 – 125 watts at 8 ohms

3165-530630: 5C82



Acclaim 5 Series 8" In-Ceiling, 150 watts

2-way in-ceiling speaker pair
8.0" injection molded polypropylene and Kevlar woofer with a 1.0" pivoting silk tweeter,
power handling from 10 – 150 watts at 8 ohms

3165-530647: 5C84



Acclaim 5 Series 8" In-Ceiling, 150 watts

2-way in-ceiling speaker pair
8.0" aluminum woofer with a 1.0" pivoting titanium tweeter,
power handling from 10 – 150 watts at 6/8 ohms

3165-530654: 5C85



Acclaim 5 Series 6.5" In-Wall, 85 watts

2-way in-wall speaker pair
6.5" vacuum formed polypropylene woofer with a 1.0" pivoting silk tweeter,
power handling from 10 – 85 watts at 8 ohms

3165-530678: 5W62



Acclaim 5 Series 6.5" In-wall, 100 watts

2-way in-wall speaker pair
6.5" injection molded polypropylene and Kevlar woofer with a 1.0" pivoting silk tweeter, power
handling from 10 – 100 watts at 8 ohms

3165-530685: 5W64



Acclaim 5 Series 8" In-wall, 175 watts

2-way in-wall speaker pair
8.0" woven Kevlar woofer with a 1.0" pivoting titanium tweeter,
power handling from 10 – 175 watts at 6/8 ohms

3165-530692: 5W87

Acclaim® architectural loudspeakers

Acclaim® 5 and 7 Series, Architectural Loudspeakers

Model	Type	Woofer	Woofer Material	Tweeter	Tweeter Material	Frequency Range (-6dB/+0dB)
5 Series In-Ceiling						
5C51	2-way	5.25"	Vacuum Form Polypropylene	13mm	PEI	54Hz–20kHz
5C51S	Single-Point Stereo	5.25"	Vacuum Form Polypropylene	13mm	PEI	49Hz–20kHz
5C61	2-way	6.5"	Vacuum Form Polypropylene	13mm	PEI	46Hz–20kHz
5C62	2-way	6.5"	Vacuum Form Polypropylene	25mm	Silk	46Hz–20kHz
5C61S	Single-Point Stereo	6.5"	Vacuum Form Polypropylene	13mm	PEI	43Hz–20kHz
5C64S	Single-Point Stereo	6.5"	IMPP W/ Kevlar Filler	13mm	Silk	40Hz–20kHz
5C82	2-way	8"	Vacuum Form Polypropylene	25mm	Silk	30Hz–20kHz
5C84	2-way	8"	IMPP W/ Kevlar Filler	25mm	Silk	28Hz–20kHz
5C85	2-way	8"	Aluminum	25mm	Titanium	32Hz–20kHz
5C85S	Single-Point Stereo	8"	Aluminum	25mm	Titanium	37Hz–20kHz
5 Series In-Wall						
5W62	2-way	6.5"	Vacuum Form Polypropylene	25mm	Silk	46Hz–20kHz
5W64	2-way	6.5"	IMPP W/ Kevlar Filler	25mm	Silk	44Hz–20kHz
5W87	2-way	8"	Woven Kevlar	25mm	Titanium	35Hz–20kHz
7 Series In-Ceiling						
7C51	2-way	5.25"	Vacuum Form Polypropylene	13mm	PEI	45Hz–20kHz
7C57	2-way	5.25"	Yellow Kevlar	25mm	Al/Mg	47Hz–27kHz
7C72	2-way	7"	Vacuum Form Polypropylene	25mm	Silk	38Hz–20kHz
7C74	2-way	7"	IMPP Ribbed Cone	25mm	Silk	34Hz–20kHz
7C74S	Single-Point-Stereo	7"	IMPP Ribbed Cone	25mm	Silk	28Hz–20kHz
7C75	2-way	7"	Aluminum	25mm	Teteron	36Hz–20kHz
7C76	2-way	7"	Yellow Kevlar	25mm	Titanium	42Hz–22kHz
7C77	2-way	7"	Treated Black Kevlar	25mm	Al/Mg	42Hz–27kHz
7C78	2-way	7"	Carbon Fiber	25mm	Al/Mg	35Hz–27kHz
7C85	2-way	8"	Aluminum	25mm	Teteron	31Hz–20kHz
7C85S	Single-Point-Stereo	8"	Aluminum	25mm	Teteron	25Hz–20kHz
7C86	2-way	8"	Yellow Kevlar	25mm	Titanium	32Hz–22kHz
7 Series In-Wall						
7W75	2-way	7"	Aluminum	25mm	Teteron	36Hz–20kHz
7W76	2-way	7"	Yellow Kevlar	25mm	Titanium	42Hz–22kHz
7W77	2-way	7"	Treated Black Kevlar	25mm	Al/Mg	42Hz–27kHz
7W86	3-way	8"	Yellow Kevlar	25mm	Titanium	32Hz–22kHz
7W55LCR	2-way	5.25"	Aluminum	25mm	Teteron	44Hz–20kHz
7W57LCR	2-way	5.25"	Treated Black Kevlar	25mm	Al/Mg	41Hz–27kHz

Grille Type	Sensitivity dB SPL (2.83V @ 1m)	Nominal Impedance	Max Amp. Power	Feature	Cutout Dimensions	Depth	Rough-in Bracket
Steel	87 dB	8 ohm	75W	—NA—	7.25"	3"	SB-C50
Steel	87 dB	6 ohm per channel	75W	—NA—	7.25"	3"	SB-C50
Steel	87 dB	8 ohm	75W	—NA—	8.375"	3.5"	SB-C67
Steel	87 dB	8 ohm	85W	—NA—	8.375"	3.5"	SB-C67
Steel	87 dB	6 per channel	75W	—NA—	8.375"	3.5"	SB-C67
Steel	88 dB	6 per channel	100W	—NA—	8.375"	3.5"	SB-C67
Steel	88 dB	8 ohm	125W	—NA—	9.875"	4.2"	SB-C80
Steel	89 dB	8 ohm	150W	—NA—	9.875"	4.2"	SB-C80
Steel	90 dB	6 ohm/8 ohm	150W	—NA—	9.875"	4.2"	SB-C80
Steel	89 dB	6 ohm per channel	150W	—NA—	9.875"	4.2"	SB-C80
Steel	87 dB	8 ohm	85W	—NA—	10.75" x 6.75"	3.3"	SB-W60
Steel	87 dB	8 ohm	100W	—NA—	10.75" x 6.75"	3.3"	SB-W60
Steel	90 dB	6 ohm/8 ohm	175W	—NA—	13.375" x 8.75"	3.94"	SB-W80
Steel	87.5 dB	6 ohm	75W	Twist and tilt 15 degrees	7.25"	4.5"	SB-C50
Aluminum	88 dB	4, 5, 6 ohm	125W	Twist and tilt 15 degrees	6.75"	4.5"	SB-C50
Steel	91 dB	6 ohm	85W	Twist and tilt 15 degrees	8.375"	4.5"	SB-C67
Steel	90 dB	6 ohm	100W	Twist and tilt 15 degrees	8.375"	4.5"	SB-C67
Steel	90 dB	6 ohm/6 ohm	100W	Twist and tilt 15 degrees	8.375"	4.5"	SB-C67
Aluminum	90 dB	6 ohm	125W	Twist and tilt 15 degrees	8.375"	4.75"	SB-C67
Aluminum	90 dB	4, 5, 6 ohm	150W	Twist and tilt 15 degrees	8.375"	4.75"	SB-C67
Aluminum	90 dB	4, 5, 6 ohm	175W	Twist and tilt 15 degrees	8.375"	4.75"	SB-C67
Aluminum	90 dB	4, 5, 6 ohm	200W	Twist and tilt 15 degrees	8.375"	4.75"	SB-C67
Steel	91 dB	6 ohm	125W	Twist and tilt 15 degrees	9.875"	5.0"	SB-C80
Steel	91 dB	6 ohm/6ohm	125W	Twist and tilt 15 degrees	9.875"	5.0"	SB-C80
Aluminum	91 dB	4, 5, 6 ohm	150W	Twist and tilt 15 degrees	9.875"	5.125"	SB-C80
Steel	88 dB	6 ohm	125W	Iso-mount	13" x 8.25"	3.6"	SB-W70
Aluminum	90.5 dB	4, 5, 6 ohm	150W	Iso-mount	13" x 8.25"	3.9"	SB-W70
Aluminum	90.5 dB	4, 5, 6 ohm	175W	Iso-mount	13" x 8.25"	3.9"	SB-W70
Aluminum	90 dB	4, 5, 6 ohm	150W	Iso-mount	15.125" x 9.125"	3.9"	SB-W83
Steel	90 dB	4, 5, 6 ohm	100W	Iso-mount	7.25 x 14.25"	3.9"	SB-7LCR
Aluminum	90 dB	4, 5, 6 ohm	150W	Iso-mount	7.25 x 14.25"	3.9"	SB-7LCR

Acclaim® architectural loudspeakers

Russound Acclaim 7 Series



Acclaim 7 Series 7" In-Ceiling Single Point Stereo, 100 watts

In-ceiling Single Point Stereo, Twist & Tilt speaker
7.0" injection molded polypropylene and Kevlar woofer with a 1.0" pivoting silk tweeter, power handling from 10 – 100 watts total at 6 ohms per channel

3155-529283: 7C74S



Acclaim 7 Series 8" In-Ceiling Single Point Stereo, 125 watts

In-ceiling Single Point Stereo, Twist & Tilt speaker
8.0" aluminum woofer with a 1.0" pivoting Teteron tweeter, power handling from 10 – 125 watts total at 6 ohms per channel

3155-529290: 7C85S



Acclaim 7 Series 5.25" In-Ceiling, 75 watts

2-way in-ceiling Twist & Tilt speaker pair
5.25" vacuum formed polypropylene woofer with a 0.5" pivoting polyamide tweeter, power handling from 10 – 75 watts at 6 ohms

3155-529061: 7C51



Acclaim 7 Series 5.25" In-Ceiling, 125 watts

2-way in-ceiling Twist & Tilt speaker pair
5.25" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter, power handling from 10 – 125 watts at 4/5/6 ohms

3155-529078: 7C57



Acclaim 7 Series 7" In-Ceiling, 85 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" vacuum formed polypropylene woofer with a 1.0" pivoting silk tweeter, power handling from 10 – 85 watts at 6 ohms

3155-529092: 7C72



Acclaim 7 Series 7" In-Ceiling, 100 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" injection molded polypropylene and Kevlar woofer with a 1.0" pivoting silk tweeter, power handling from 10 – 100 watts at 6 ohms

3155-529108: 7C74



Acclaim 7 Series 7" In-Ceiling, 125 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" aluminum woofer with a 1.0" pivoting Teteron tweeter, power handling from 10 – 125 watts at 6 ohms

3155-529115: 7C75



Acclaim 7 Series 7" In-Ceiling, 150 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" woven Kevlar woofer with a 1.0" pivoting titanium tweeter, power handling from 10 – 150 watts at 4/5/6 ohms

3155-529122: 7C76



Acclaim 7 Series 7" In-Ceiling, 175 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter, power handling from 10 – 175 watts at 4/5/6 ohms

3155-529139: 7C77



Acclaim 7 Series 7" In-Ceiling, 200 watts

2-way in-ceiling Twist & Tilt speaker pair
7.0" carbon fiber woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter,
power handling from 10 – 200 watts at 4/5/6 ohms
3155-529146: 7C78



Acclaim 7 Series 8" In-Ceiling, 125 watts

2-way in-ceiling Twist & Tilt speaker pair
8.0" aluminum woofer with a 1.0" pivoting Teteron tweeter,
power handling from 10 – 125 watts at 6 ohms
3155-529153: 7C85



Acclaim 7 Series 8" In-Ceiling, 150 watts

2-way in-ceiling Twist & Tilt speaker pair
8.0" woven Kevlar woofer with a 1.0" pivoting titanium tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms
3155-529160: 7C86



Acclaim 7 Series 7" In-wall, 125 watts

2-way in-wall Iso-Mount speaker pair
7.0" aluminum woofer with a 1.0" pivoting Teteron tweeter,
power handling from 10 – 125 watts at 6 ohms
3155-529214: 7W75



Acclaim 7 Series 7" In-wall, 150 watts

2-way in-wall Iso-Mount speaker pair
7.0" woven Kevlar woofer with a 1.0" pivoting titanium tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms
3155-529221: 7W76



Acclaim 7 Series 7" In-wall, 175 watts

2-way in-wall Iso-Mount speaker pair
7.0" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter,
power handling from 10 – 175 watts at 4/5/6 ohms
3155-529238: 7W77



Acclaim 7 Series 8" In-wall, 150 watts

3-way in-wall Iso-Mount speaker pair
8.0" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms
3155-52945: 7W86



Acclaim 7 Series 5.25" In-wall LCR, 100 watts

Passive 2-way LCR Iso-Mount speaker
5.25" aluminum woofer with a 1.0" pivoting Teteron tweeter,
power handling from 10 – 100 watts at 4/5/6 ohms
3155-529306: 7W55LCR




Acclaim 7 Series 5.25" In-wall LCR, 150 watts

Passive 2-way LCR Iso-Mount speaker
5.25" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms
3155-529313: 7W57LCR



Low Power meet Ratio: perfectly matched for amplified keypads

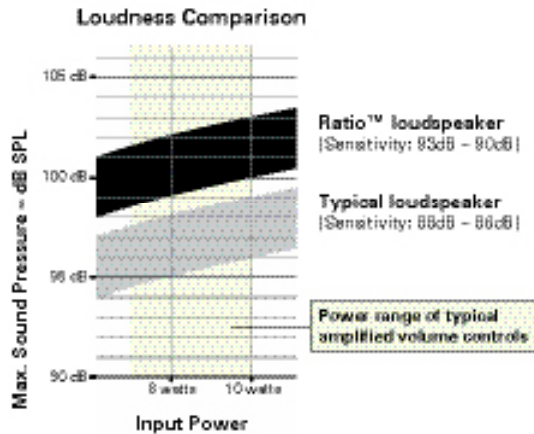

Ratio 6½" In-ceiling Single Point Stereo

6.5" dual voice coil polypropylene woofer, dual 0.5" (13 mm) polyetherimide dome tweeter, 8 ohms. Steel grilles included. Cut Out Dimension: 8.38" (21.3 cm) diameter

3200-526985: RC61S

Shipping Weight 4 lbs. (1.8 kg)



Ratio 6½" In-ceiling

6.5" (16.5 cm) polypropylene woofer, 0.5" (13 mm) polyetherimide dome tweeter, 8 ohms. Steel grilles included. Cut Out Dimension: 8.38" (21.3 cm) diameter

3200-526954: RC61

Shipping Weight 8 lbs. (3.6 kg)



Ratio 8" In-ceiling

8" (20.3 cm) polypropylene woofer, 0.5" (13 mm) polyetherimide dome tweeter, 8 ohms. Steel grilles included. Cut Out Dimension: 9.88" (25.1 cm) diameter

3200-526961: RC81

Ship Weight 9.5 lbs. (4.3 kg)



Ratio 6" x 9" In-wall

Rectangular 2-way in-wall loudspeaker pair 6" x 9" (15.2 x 22.9 cm) polypropylene woofer, 0.5" (13 mm) polyetherimide dome tweeter, aluminum grille, 8 ohms. Cut Out Dimension: 6.75" W x 10.75" H (17.1 cm x 27.3 cm)

3200-526978: RW691

Ship Weight 9.5 lbs. (4.3 kg)



Ratio Indoor/outdoor

Multipurpose indoor/outdoor speaker. Two-way design with 6" x 9" polypropylene woofer and 1/2" polyetherimide dome tweeter in a weather-resistant ABS enclosure. Complete with mounting bracket for on-wall installation.

3200-527357: RM691 White

3200-528620: RM691 Black
Ship Weight 11.3 lbs (5.1 kg)

28

Ratio® High-Efficiency Architectural Loudspeakers

Model	Description	Dimensions	Cut Out	Mount Depth	Woofer	Tweeter	Power	Impedance	Efficiency	Frequency Response
RC61S	6.5" single-point stereo round ceiling	9.8" (24.9 cm) diameter	8.38" (21.3 cm)	2.8" (7.1 cm)	6.5" (16.5 cm) polypropylene cone, Dual voice coil	(2) 1/2" (13 mm) polyetherimide domes	20W	8/8 ohm	93 dB	70 Hz - 20kHz ±3 dB
RC61	6.5" two-way round ceiling	9.8" (24.9 cm) diameter	8.38" (21.3 cm)	2.8" (7.1 cm)	6.5" (16.5 cm) polypropylene cone	1/2" (13 mm) polyetherimide dome	20W	8 ohm	90 dB	76 Hz - 20kHz ±3 dB
RC81	8" two-way round ceiling	11.3" (28.7 cm) diameter	9.88" (25.1 cm)	3.4" (8.6 cm)	8" (20.3 cm) polypropylene cone	1/2" (13 mm) polyetherimide dome	20W	8 ohm	92 dB	71 Hz - 20kHz ±3 dB
RW691	6" x 9" two-way wall	8.2" W x 12.2" H (20.8 x 31.0 cm)	6.75" W x 10.75" H (17.1 x 27.3 cm)	3.6" (9.1 cm)	6" x 9" (15.2 x 22.9 cm) polypropylene cone	1/2" (13 mm) polyetherimide dome	20W	8 ohm	90 dB	64 Hz - 20kHz ±3 dB
RM691	Two-way indoor/outdoor surface-mount	23.6" W x 7.9" H x 8.0" D (60.0 x 20.1 x 20.3 cm)	NA	8.0"-9.25" (20.3-23.5 cm)	6" x 9" (15.2 x 22.9 cm) polypropylene cone	1/2" (13 mm) polyetherimide dome	20W	8 ohm	94 dB	85 Hz - 20 kHz ±3 dB

Universal Loudspeaker



Universal 6½" In-ceiling

Round 2-way In-ceiling Loudspeaker. Features: 6.5" polypropylene woofer, pivoting 3/4" neodymium mylar tweeter, 50 watts per channel, 8 ohms. Steel grilles included. Cut Out Dimension: 7.625" (19.3 cm) diameter.

3110-528194: 1C61

Shipping Weight 3 lbs (1.4 kg)

Russound Rough-In Speaker Brackets



5.25" In-ceiling
Rough-in Bracket
3901-530715:
SB-C50

6-Pack
3901-531804:
SB-C50-6P




6.5" In-ceiling
Rough-in Bracket
3901-530722:
SB-C67

6-Pack
3901-531811:
SB-C67-6P




8" In-ceiling
Rough-in Bracket
3901-530739:
SB-C80

6-Pack
3901-531828:
JSB-C80-6P




6.25" In-wall
Rough-in Bracket
3901-530746:
SB-W60

6-Pack
3901-531835:
SB-W60-6P




8" In-wall
Rough-in Bracket
3901-530760:
SB-W80

6-Pack
3901-531859:
SB-W80-6P




5.25" LCR In-wall
Rough-in Bracket
3901-530791:
SB-7LCR

6-Pack
3901-531880:
SB-7LCR-6P



Acclaim 7 Series
7" In-wall
Rough-in Bracket
3901-530753:
SB-W70

6-Pack
3901-531842:
SB-W70-6P







Acclaim 7 Series
8" 3-way In-wall
Rough-in Bracket
3901-530777:
SB-W83

6-Pack
3901-531866:
SB-W83-P

Russound Flexbox Back boxes


Russound's Flexbox speaker back boxes reduce background noise, provide a moisture barrier, diffuse distortion, and improve sound quality. The flexible construction allows for easy installation in retrofit or new construction settings. Both models are flame retardant and meet ASTM E119 and UL 263/ NFPA 251 (1-hour) and ASTM E84/NFPA 70 standards.

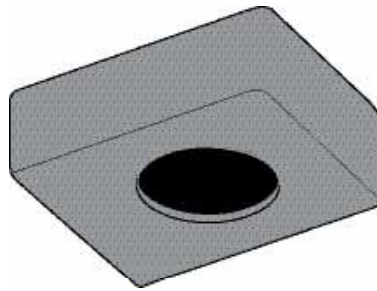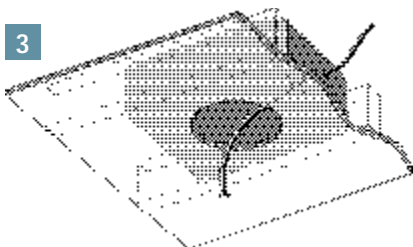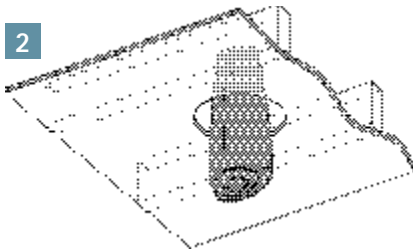

Flexbox Fire Rated In-ceiling Back Box

Dim: 14"W x 6"D x 17.5"H (355 x 152 x 445 mm)
Material Thickness: 1" (25 mm) nominal thickness
Weight: 6.7 lbs (3 kg)
Material: Proprietary Composite Material
STC Rating: 32
Flame Spread: 23
Smoke Density: 30 (ASTM E84/ NFPA 70)
Thermal Value: R 4.2
Temperature Range: -40° F to 350° F
(-40° C to 177° C)
Fire Rating: CLASS 1 Fire Rated ASTM E119 /NFPA
251 and UL 263 for 1 Hour Fire Rating

3801-531286: FBC1-FR

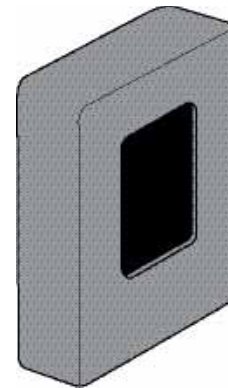


Flexbox Fire Rated In-wall Back Box

Dim: 14.5"W x 3.5"D x 16"H (368 x 89 x 406 mm)
Material Thickness: 1" (25 mm) nominal thickness
Weight: 5.4 lb (2.4 kg)
Material: Proprietary Composite Material
STC Rating: 32
Flame Spread: 23
Smoke Density: 30 (ASTM E84/ NFPA 70)
Thermal Value: R 4.2
Temperature Range: -40° F to 350° F
(-40° C to 177° C)
Fire Rating: CLASS 1 Fire Rated ASTM E119 /NFPA
251 and UL 263 for 1 Hour Fire Rating

3801-531262: FBW1-FR

OutBack Indoor/outdoor loudspeakers

OutBack Rock Speakers



Gray Granite

3120-524141: OB-R6G

Shipping Weight 12.5 lbs (5.7 kg)



White Sandstone

3120-524158 OB-R6W

Shipping Weight 12.5 lbs (5.7 kg)



Fieldstone

3120-524165: OB-R6F

Shipping Weight 12.5 lbs (5.7 kg)

OutBack Rocks

Russound's OutBack Rock Speakers, blend into any landscape, withstand the elements and were optimized for outdoor audio performance. The cast enclosure is made from a glass-reinforced resin to provide a sturdy, waterproof cabinet with low acoustic resonance for better sound. Impedance: 8 ohms. Efficiency: 89dB (1 watt @ 1 meter) Recommended power handling: 10-100 watts. 14" W x 10" H x 9.25" D (35.6 x 25.4 x 23.5 cm)

OutBack indoor/outdoor Speakers

30



OutBack 4" Speakers

Sold in pairs only. Complete with mounting bracket and terminal shields. 6.75" W x 8.625" H x 5.875" D (17.5 x 22 x 14.95 cm)

3120-114397: OB-4.1 White

3120-114502: OB-4.1 Black

Shipping Weight 10 lbs (4.5 kg)



OutBack 5 1/4" Speakers

Sold in pairs only. Complete with mounting bracket and terminal shields. 7.25" W x 9.625" H x 6.5" D (18.5 x 24.5 x 16.5 cm)

3120-114410: OB-5.1 White

3120-114526: OB-5.1 Black

Shipping Weight 11.5 lbs (5.2 kg)



OutBack 6 1/2" Speakers

Sold in pairs only. Complete with mounting bracket and terminal shields. 8.5" W x 11.875" H x 7.5" D (21.6 x 30.2 x 19.1 cm)

3120-114434: OB-6.1 White

3120-114540: OB-6.1 Black

Shipping Weight 16 lbs (7.3 kg)



OutBack 5 1/4" Single point stereo

Sold individually. Complete with mounting bracket and terminal shields. 11.88" W x 8.5" H x 7.5" D (302 x 216 x 191 mm)

3120-115363: OB Solo White

3120-115356: OB Solo Black

Shipping Weight 8 lbs (3.6 kg)



Two-channel amplifier with automatic local source switching

Autosensing enables localized speaker override for a connected peripheral, such as a TV or PC. The Bridgeable power setting combines channel power for 100 watts into a single 8-ohm load, rated. 35 watts per channel RMS @ 8 Ohms.
8.625" W x 10"D x 2.375"H (22 x 25.4 x 6 cm)

2800-521874: R235LS
2800-522024: R235LS EU
2800-522222: R235LS UK
Shipping Weight 10 lbs (4.5 kg)



Two-Channel Dual Source Amplifier

Two-channel, Dual source, 90-watt amplifier with auto-source switching. Features primary and secondary audio inputs, loop output, selectable speaker level input, and 12V trigger input and output. Rated at 90 watts per channel into 8 ohms, 110 watts into 4 ohms, and bridgeable to 250 watts of power into a single 8-ohm load.

2800-530463: R290DS
2800-530470: R290DS-EU
2800-530883: R290DS-UK
Shipping Weight 24.30 lbs (11.02 kg)



Four Zone/Eight-Channel Multiroom Amplifier (50 watt per channel)

Protection circuitry provides safety and reliability under heavy use. Amplifies up to four stereo line-level sources. Zones have dedicated line level inputs or can share a source via the bus input. Separate gain controls for each zone to preset room sound levels. Zone output can be switched to stereo or bridge mono output. In bridged mode, a zone's left and right channels are combined for a higher-power mono output, ideal for large rooms or outdoor listening areas. A+B speaker output in 4 ohm mode. Rack ears included. 50 watts per channel RMS @ 8 Ohms x 8
17" W x 16.5"D x 5.875"H (43 x 42 x 15 cm)

2800-521904: R850MC
2800-522048: R850MC EU
2800-522178: R850MC UK
Shipping Weight 51 lbs (23 kg)



Six Zone/Twelve-Channel Multiroom Amplifier (50 watt per channel)

Zones have dedicated line level inputs or can share a source via the bus input. Separate gain controls for each zone to preset room sound levels. Zone output can be switched to stereo or bridge mono output. In bridged mode, a zone's left and right channels are combined for a higher-power mono output, ideal for large rooms or outdoor listening areas. A+B speaker output in 4 ohm mode. Rack ears included. 50 watts per channel RMS @ 8 Ohms x 12. 17" W x 16.5"D x 5.875"H (43 x 42 x 15 m)

2800-521881: R1250MC
2800-522055: R1250MC EU
2800-522208: R1250MC UK
Shipping Weight 61.25 lbs (27.8 kg)

Volume Controls

ALTx Series 126 Watts



ALTx-2D

Volume control, with Decora® insert and knob. (cover plate included). detachable 12 gauge connector. (1x, 2x, 4x, 8x) impedance matching. 1.75" W x 2.5" H x 2.5" D (44.5 x 63.5 x 63.5 mm)

6100-526893: White, Almond & Bone
6100-114748: Black
6100-114250: Brown

Shipping Weight
 2 lbs (.9kg)



ALTx-2

Volume Control, with standard plate and knob detachable. 12 gauge connector. (1x, 2x, 4x, 8x) impedance matching. 1.75" W x 2.5" H x 2.5" D (44.5 x 63.5 x 63.5 mm)

6100-526886: White, Almond & Bone
6100-116377: Black
6100-113666: Brown

Shipping Weight

2 lbs (.9kg)



ALTx-WIRi 2D

Volume Control with Built-in Infrared Receiver. Decora® insert and knob (cover plate included). 12 position switch. Accepts up to 14 gauge wire. 1x, 2x, 4x, 8x impedance matching. 1.75" W x 2.5" H x 2.9375" D (44.5 x 63.5 x 74 mm)

6100-117084: White
6100-117091: Almond
6100-117107: Bone
6100-117954: Black
6100-117961: Brown

Shipping Weight
 1 lbs (.5kg)



WALTx-2

Weatherproof Volume Control with Standard Plate and Knob. 12 position switch, 1x and 2x, 4x, 8x impedance matching. Fits a standard 3/4" PVC Outdoor conduit. Gray only. 3" W x 5" H x 3.75" D (76.5 x 127 x 95.5 mm)

6500-114113
 Shipping Weight
 1.75 lbs (.79 kg)



ALTx-MP-1

Contains (30) ALTx-2D volume controls.

6100-526923: White, Almond & Bone
6100-116476: Black
6100-116483: Brown

Shipping Weight
 37 lbs (16.7kg)



ALTx-MP-2

Contains (30) ALTx-2 volume controls

6100-526947: White, Almond & Bone
6100-116520: Black
6100-116537: Brown

Shipping Weight
 37 lbs (16.7kg)

LPTx Series 75 Watts



LPTx-2

Volume Control, with standard plate and knob accepts up to 14 gauge wire. 1x, 2x, 4x, 8x impedance matching. 1.75" W x 2.75" H x .625"D (44.5 x 70 x 66.7 mm)

6200-114991: White
6200-115141: Almond
6200-114090: Bone

Shipping Weight
 1.25 lbs (.57 kg)



LPTx-2D

Volume Control, with Decora® insert and knob (cover plate included). Accepts up to 14 gauge wire. 1x, 2x, 4x, 8x impedance matching. 1.75" W x 2.75" H x 2.625"D (44.5 x 70 x 66.7 mm)

6200-113512: White
6200-113536: Almond
6200-113529: Bone

Shipping Weight
 1.25 lbs (.57 kg)



LPTx-MP-1

Contains (30) LPTx-2D volume controls

6200-116551: White
6200-116544: Almond
6200-116568: Bone

Shipping Weight
 37 lbs (16.7kg)



LPTx-MP-2

(30) LPTx-2

6200-116582: White
6200-116575: Almond
6200-116599: Bone

Shipping Weight
 37 lbs (16.7kg)

LPTX Master Packs

ALTX Master Packs

Color Conversion Components



SP-6

(6) Plastic plates for ALTx & LPTx models.

9510-115110: White
9510-115080: Almond
9510-115097: Bone
9510-115073: Black
9510-115103: Brown

Shipping Weight
 1 lbs (.5kg)



ACRP26

(6) Decora® cover plates. Fits ALTx, LPTx models.

7105-115479: White
7105-115493: Almond
7105-115486: Bone
7105-115509: Black
7105-115516: Brown

Shipping Weight
 1 lbs (.5kg)



DP-6

(6) Decora® inserts. Fits ALTx, LPTx models.

9510-115165: White
9510-115127: Almond
9510-115660: Bone
9510-115134: Black
9510-115158: Brown

Shipping Weight
 1 lbs (.5kg)



DP-WIR

(6) IR Conversion kit with IR receiver and Decora®. For use with ALTx, LPTx and A70-1M models.

5100-115820: White
5100-115806: Almond
5100-115813: Bone
5100-118807: Black
5100-118791: Brown

Shipping Weight
 1 lbs (.5kg)



VCK-6

(6) Plastic Volume Control Knobs. Fits ALTx, and LPTx models.

9510-115219: White
9510-115172: Almond
9510-115196: Bone
9510-115189: Black
9510-115202: Brown

Shipping Weight
 1 lbs (.5kg)

Special Application Volume Control




Table Top Volume Control

126 Watt with headphone jack speaker override. Installer configurable from 1x, 2x, 4x or 8x impedance matching.
 6.0625" W x 2.5" H x 1.9375" D (154 x 63.5 x 49.3 mm)

6400-113161: TBL-75
 Shipping Weight 2.5 lbs (1.1kg)

Smart Select Systems



Modular Speaker Connecting Base Unit

4 speaker outputs and 1 amplifier input. Color-coded detachable 14-gauge snap connectors to support 4 zones. 4.25" W x .75" H x 1.75" D (108 x 19.1 x 44.5 mm)

8100-120961: EZB-1SC
 Shipping Weight 6oz (.2kg)



Modular Speaker Block Add-on

Adds 4 Speaker Outputs to EZB-1SC to expand to 8 Zones. 3.625" W x .75" H x 1.75" D (92.1 x 19.1 x 44.5 mm)

8100-120978: EZB-2SC
 Shipping Weight 6oz (.2kg)



Power Supply

110VAC/12V, 1000mA for the Smart Select Volume Control System. One unit required for each Separate Smart Select Volume Control System. Up to 12 controls. 2.1875" W x 2.875" H x 2.0625" D (55.7 x 73.1 x 52.4 mm)

6300-111075: 1201A
 Shipping Weight 1 lbs (.5kg)

Speaker Selectors

SS Series Single Source Selectors



4 pr. Speaker Selector, Single Source

100W/Ch. RMS, zone label. 4 Ω stable amplifiers & receivers. Resettable circuit protection. Impedance bypass switch for use with impedance matching volume controls. 8.5" W x 1.875" H x 6.25" D (22 x 4.8 x 16 cm)

3630-520679: SS-4.2

Shipping Weight
2.75 lbs (1.2kg)



6 pr. Speaker Selector, Single Source

70W/Ch. RMS, zone labels. 4 Ω stable amplifiers & receivers. Resettable circuit protection. Impedance bypass switch for use with impedance matching volume controls. 11.5" W x 1.875" H x 6.25" D (29.5 x 4.8 x 16 cm)

3630-520686: SS-6.2

Shipping Weight
3.5 lbs (1.6kg)



2 Pair Speaker Selector

100W/Ch. RMS. Color-coded detachable 14-gauge snap connector standard configuration is 4x - Installer may change configuration to 2x or 8x. Zone identifying labels included. 8.5" W x 3" H x 6.25" D (22 x 8 x 16 cm)

3615-604010: SDB-2.1

Shipping Weight
5.5 lbs (2.5 kg)



4 Pair Speaker Selector

200W/Ch. RMS. Color-coded detachable 14-gauge snap connectors. Standard configuration is 4x - Installer may change configuration to 2x or 8x. Zone identifying labels included. 17" W x 3" H x 6.25" D (43.5 x 8 x 16 cm)

3615-604027: SDB-4.1

Shipping Weight
9 lbs 4.1kg)



6 pair Speaker Selector

150 W/Ch. RMS. Color-coded detachable 14-gauge snap connectors. Standard configuration is 8x - Installer may change configuration to 2x or 4x. Zone identifying labels included. 17" W x 3" H x 6.25" D (43.5 x 8 x 16 cm)

3615-604034: SDB-6.1

Shipping Weight
11 lbs (5 kg)

Autoformer-Based Speaker Selectors



6 pair Speaker Selector/Impedance Matching

100W/Ch. RMS with subsonic filter built in. Color-coded detachable 14-gauge snap connectors. Zone identifying labels included. 17" W x 2.875" H x 8" D (43.5 x 7.5 x 20.5 cm)

3610-603075: PRO-6 HP

Shipping Weight
9.5 lbs (4.3 kg)



8 pair Speaker Selector/Impedance Matching

100W/Ch. RMS with subsonic filter, built in. Color-coded detachable 14-gauge snap connectors. Zone identifying labels included. 17" W x 2.875" H x 8" D (43.5 x 7.5 x 20.5 cm)

3610-603136: PRO-8 HP

Shipping Weight 10 lbs (4.5kg)



12 pair Speaker Selector/Impedance Matching

100W/Ch. RMS with subsonic filter built in. Color-coded detachable 14-gauge snap connectors. Zone identifying labels included. 17" W x 2.875" H x 8" D (43.5 x 7.5 x 20.5 cm)

3610-603037: PRO-12 HP

Shipping Weight 10 lbs (4.5kg)

Impedance Matching Devices



WB-1

Custom order as 2x, 4x or 8x. 3.25" W x 2.25" H x 3.25" D (83 x 57.5 x 83 mm)

Not available in countries with RoHS requirements

4000-606694: 2x Setting

4000-606700: 4x Setting

4000-606717: 8x Setting

Shipping Weight 2 lbs (.9kg)



WCN-12

Speaker distribution and autoformer impedance matching system. Single source to 12 pairs of speakers. Color-coded detachable 14-gauge snap connectors. 100W/Ch. RMS. 19" W x 3.5" H x 3" D (48.5 x 9 x 8.5 cm)

Not available in countries with RoHS requirements

4000-606724

Shipping Weight
6.5 lbs (2.9 kg)

Miscellaneous Speaker Selectors



In-wall, Dual-Source Selector

Allows a single pair of speakers to be driven by either of two amplifiers or allow a single amplifier to drive either of two pair of speakers. Decora® wallplate not included. 1" W x 2.75" H x 1.75" D (25.5 x 70 x 44.5 mm)

3699-520501: White AB-1.2

3699-520532: Almond AB-1.2

3699-520556: Bone AB-1.2

3699-521294: Brown AB-1.2

3699-521317: Black AB-1.2

Shipping Weight 3 oz (85 g)




Tabletop, Dual-Source Selector

Dual-source selector switch tabletop unit, allow a single pair of speakers to be driven by either of two amplifiers or allow a single amplifier to drive either of two pair of speakers. 5.5" W x 2.875" H x 3" D (140 x 73.5 x 76.5 mm)

3699-520525: AB-2.2

Shipping Weight 1.25 lbs (.57 kg)



Automatic Source Selector

Automatic A/B speaker selector, speaker level switching, selectable delay and sensitivity. Color-coded detachable 14-gauge snap connectors. Detachable 12VDC power supply 6.25" W x 2" H x 1.55" D (159 x 51 x 39 mm)

3699-520914: AB-3.2

3699-521270: AB-3.2 EU

3699-521287: AB-3.2 UK

Shipping Weight 1.7 lbs (.8kg)

ComPoint BASIC 4 Zone Kits




ComPoint Basic 4 zone Kit

Includes 4 basic keypads (ISK1) with white and almond conversion plates, hub (ISH1), and power supply (ISPS). **Wall plate and speakers not included.**

2300-526787: ISB40
 2300-527173: ISB40 EU
 2300-527159: ISB40 UK
 Shipping Weight 5.7 lbs. (2.6 kg)

*EU/UK kits contain screwless wallplates

ComPoint BASIC 6 Zone Kits




ComPoint Basic 4 zone kit w/Door Station

Includes 4 basic keypads (ISK1) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and antiqued brass finish door station (ISK3). **Wall plate and speakers not included.**

2300-526381: ISB4
 2300-527142: ISB4 EU
 2300-527135: ISB4 UK
 Shipping Weight 6.5 lbs. (2.9 kg)

*EU/UK kits contain screwless wallplates




ComPoint Basic 6 zone kit

Includes 6 basic keypads (ISK1) with white and almond conversion plates, hub (ISH1), and power supply (ISPS). **Wall plate and speakers not included.**

2300-526794: ISB60
 2300-527197: ISB60 EU
 2300-527180: ISB60 UK
 Shipping Weight 6.7 lbs. (3 kg)

*EU/UK kits contain screwless wallplates




ComPoint Basic 6 zone kit w/ Door Station

Includes 6 basic keypads (ISK1) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and antiqued brass finish door station (ISK3). **Wall plate and speakers not included.**

2300-526398: ISB6
 2300-527210: ISB6 EU
 2300-527203: ISB6 UK
 Shipping Weight 7.6 lbs. (3.4 kg)

*EU/UK kits contain screwless wallplates

Adv. 4 Zone Kits



ComPoint Adv. 4 zone kit

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), and power supply (ISPS) and antiqued brass finish door station (ISK3). **Wall plate and speakers not included.**

2300-527029: ISA4
 2300-527470: ISA4 EU
 2300-527487: ISA4 UK
 Shipping Weight 6.5 lbs. (2.9 kg)

*EU/UK kits contain screwless wallplates

ComPoint ADVANCED 6 Zone Kits




ComPoint Adv. 6 zone kit

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), and power supply (ISPS). **Wall plate and speakers not included.**

2300-526800: ISA60
 2300-527234: ISA60 EU
 2300-527227: ISA60 UK
 Shipping Weight 6.7 lbs. (3 kg)

*EU/UK kits contain screwless wallplates




ComPoint Adv. 6 zone kit w/ Door Station

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and antiqued brass finish door station (ISK3). **Wall plate and speakers not included.**

2300-526404: ISA6
 2300-527258: ISA6 EU
 2300-527241: ISA6 UK
 Shipping Weight 7.6 lbs. (3.4 kg)

*EU/UK kits contain screwless wallplates



ComPoint Adv. 6 zone w/ 2 Door Stations

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and two antiqued brass finish door stations (ISK3). **Wall plate and speakers not included.**

2300-526411: ISA62
 2300-527272: ISA62 EU
 2300-527265: ISA62 UK
 Shipping Weight 8.5 lbs. (3.6 kg)

*EU/UK kits contain screwless wallplates



ComPoint Basic Keypad

Single-gang Decora® style keypad. Selects zones and door stations, controls receive volume, sets Do Not Disturb. Internal microphone with automatic gain control. Built-in amplifier powers one or two external speakers. 110 punch-down. Installer-selectable amber or green key backlighting. **Wall plate and speakers not included.** 1.875" W x 4" H x 2.25" D (4.8 x 10.2 x 5.7 cm)

2300-528286: White & Almond ISK1
2300-526299: Bone ISK1
2300-526312: Brown ISK1
2300-526329: Black ISK1
 Shipping Weight 4.8 oz (136g)



ComPoint Advanced Keypad

Single-gang Decora® style keypad. Five-character LCD display, assignable zone names and indicates functions and volume level. Selects zones and door stations, controls receive volume, sets Do Not Disturb. Internal microphone with automatic gain control. Built-in amplifier powers one or two external speakers. Speaker relay allows the keypad to share speakers with an audio system for high-fidelity communications. 110 punch-down. Installer-selectable amber or green backlighting. (Required for systems with over 6 zones.) **Wall plate and speakers not included.** 1.875" W x 4" H x 2.625" D (4.8 x 10.2 x 6.7 cm)

2300-525384: White & Almond ISK2
2300-526336: Bone ISK2
2300-526350: Brown ISK2
2300-526367: Black ISK2
 Shipping Weight 5.6 oz (159g)



ComPoint Door Station

Weatherproof call station fits a single-gang deep wall box. Plated die-cast zinc cover plate mounts flush to exterior wall. Internal microphone with automatic gain control. Built-in amplifier and speaker. 110 punch-down connector for CAT-5 cable. Internal relay with screw terminals for connecting to an external doorbell. Amber-backlighted Call key. 3" W x 5.125" H x 3" D (7.6 x 13.0 x 7.6 cm)
 Maximum 2 Door Stations per system.

2300-525407: Antique Brass ISK3
2300-525414: Brushed Chrome ISK3
 Shipping Weight 9 oz (.26 kg)



ComPoint Camera Door Station

Weatherproof call station fits a double-gang deep wall box. Plated die-cast zinc cover plate mounts flush to exterior wall. Black and white CCTV **NTSC ONLY** camera. Internal microphone with automatic gain control. Built-in amplifier and speaker. 110 punch-down connector for CAT-5 cable. Internal relay with screw terminals for connecting to an external doorbell. Amber-backlighted Call key. Maximum 2 Door Stations per system.

2300-528880: Antique Brass ISK4
2300-528897: Brushed Chrome ISK4
 Shipping Weight 9 oz (.26 kg)



ComPoint Speaker

Single-gang Decora®-style in-wall speaker for use with the ComPoint intercom system. It installs beside a ComPoint keypad in a double-gang wall box. The ISSP allows ComPoint to be used as a stand-alone system. The high-quality driver in the ISSP is ideally matched to the keypad amplifier. Its moisture-resistant design makes it suitable for use in bathrooms and kitchens. Wall plate not included. 3" W x 5.125" H x 3" D (7.6 x 13.0 x 7.6 cm)
2300-588279: (White & Almond) ISSP
 Shipping Weight 8 oz (227g)



Color Conversion Kit for ISSP

Includes (4) Grilles.
 Shipping Weight 2oz (.1kg)
Wall plates and speakers not included.

2300-530494: White
2300-530500: Almond
2300-528446: Bone
2300-528453: Brown
2300-528460: Black
 Shipping Weight 8 oz (227g)



ComPoint Hub

Six-zone surface- or panel-mount controller for the ComPoint system. Up to 6 hubs can link together for a total of 36 zones. Supports 2 door stations and provides 7 doorbell chimes, individually selectable for each door. Gain control for doorbell volume. RJ-45 connectors for keypads, door stations, and hub linking. Firmware updatable. Power supply not included. 6" W x 5" H x 2" D (15.2 x 12.7 x 5.1 cm)
2300-526459: ISH1
 Shipping Weight 2 lbs. (.9 kg)

Advanced Programming Cable

Advanced programming cable for ComPoint components (ISK1, ISK2, ISK3, ISH1). Female DB-9 connection (PC end) and flat device pin connection (device end). 72" L (182.9 cm)
2500-521065
 Shipping Weight 1 lbs. (0.45 kg)

ComPoint Power Supply

15VDC 3.5A. Autosensing 100V-240VAC, detachable power cord, compact size.
 4.56" W x 1.93" H x 1.33" D (115.8 x 49 x 33.8 mm)
2300-526282: ISPS
 2300-526763: ISPS EU
 2300-526770: ISPS UK
 Shipping Weight 1 lbs. (.5kg)



ComPoint Door Strike Release Module

Surface-mount module connects between the hub and a door station to provide relay contacts for a third-party door strike release or other device. 110 punch-down connector for CAT-5 cable. Screw terminals for access to common, NC and NO relay contacts. Relay rated for 1 A @ 12 VDC. 3" W x 1.875" H x 1" D (7.6 x 4.8 x 2.5 cm)
2300-525445: ISDR1
 Shipping Weight 9 oz (.12 kg)

SaphIR Table Top Receivers



SaphIR Table Top IR receiver

The receiver is CFL-friendly and has a front panel mounted blue talk back indicator. 84" cable with 1/8" stereo mini-plug. 12 VDC. 2.28" W x .72" H x 1.68" D (55 x 18 x 42 mm)

5100-121951: 854
Shipping Weight 3 oz (85 g)



SaphIR Mini-Tabletop Kit

Includes our 854 table top IR receiver, 857 connection block, 846C power supply and (4) 845.1 IR emitters.

5100-521508: IRJ-1
Shipping Weight 1.5 lbs (.68 kg)



SaphIR Plasma-Friendly Table Top IR receiver,

Designed for Home Theater applications which use Plasma screens

5100-525933: 854P
Shipping Weight 3 oz (85 g)



SaphIR Plasma Friendly Mini-Tabletop Kit

Kit includes the 854P plasma-friendly tabletop IR receiver, 857 IR connection block, 846C power supply and (4) 845.1 IR emitters.

5100-526602: IRJ-1P
Shipping Weight 1.5 lbs (.68 kg)

SaphIR Eye Receivers



SaphIR Eye

862 Eye IR receiver is a flush-mounting design which mounts in a .5" hole. The 862 Eye is CFL-friendly and provides a blue talk back indicator visible from the front of the Eye. The 862 Eye is packaged with trim bezels in White, Black and Brass for installation flexibility. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" Diameter x 2 1/8" Long

5100-521362: 862
Shipping Weight 2 oz (57 g)



SaphIR Eye Kit

Kit includes our 862 Eye flush-mount IR receiver, 857 connection block, 846C power supply and (4) 845.1 IR emitters.

5100-521515: IRJ-2
Shipping Weight 1.5 lbs (.68 kg)



SaphIR Plasma-Friendly Eye

Designed to work in Home Theater applications which use Plasma screens. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" Diameter x 2 1/8" Long

5100-521539: 862P
Shipping Weight 2 oz (57 g)



SaphIR Plasma Friendly Eye Kit

Kit includes the 862P Eye plasma-friendly flush-mount IR receiver, 857 IR connection block, 846C power supply and (4) 845.1 IR emitters.

5100-526619: IRJ-2P
Shipping Weight 1.5 lbs (.68 kg)

SaphIR Emitters



SaphIR Emitter

77" cable length.

5100-114076: 845.1
Shipping Weight 6oz (.2kg)



SaphIR Dual Head Emitter

77" cable length.

5100-113789: 1584.1
Shipping Weight 6oz (.2kg)



SaphIR LED Emitter

Stick-on emitter for controlling A/V equipment with highly sensitive IR receivers such as satellite receivers and cable boxes. 77" cable length. .5" x .375" x .25"D (12.7 x 9.6 x 6.4 mm)

5100-530340: 845.2
Shipping Weight 6oz (.2kg)



Dual Head LED Emitter

Stick-on emitter for controlling A/V equipment with highly sensitive IR receivers such as satellite receivers and cable boxes. 77" cable length. .5" x .375" x .25"D (12.7 x 9.6 x 6.4 mm)

5100-530357: 1584.2
Shipping Weight 6oz (.2kg)



SaphIR Phantom

IR receiver that mounts anywhere. The receiver is CFL-friendly and has a blue talk back indicator visible at the front of the Phantom. Its small size makes it easy to hide in plain view. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" W x 3/8" H x 2 1/8" D

5100-119620: White 860
5100-119637: Black 860
 Shipping Weight 2 oz (57 g)



SaphIR Phantom Kit

Kit includes the 860 Phantom mini IR receiver, 857 IR connection block, 846C power supply and (4) 845.1 IR

5100-526626: IRJ-4
 Shipping Weight 1 lbs (.5kg)



SaphIR Plasma-Friendly Phantom

Designed to work in Home Theater applications which use Plasma screens. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" Diameter x 2 1/8" Long
5100-525957: Silver 860P
5100-525940: Black 860P
 Shipping Weight 2 oz (57 g)



SaphIR Plasma-Friendly Phantom Kit

Kit includes the 860P Phantom plasma-friendly surface mount mini IR receiver, 857 connection block, 846C power supply and (4) 845.1 IR emitters.

5100-526633: IRJ-4P
 Shipping Weight 1 lbs (.5kg)

SaphIR In-Wall Receivers



SaphIR In-Wall receiver

mounts in a standard single-gang wall box. The receiver is CFL-friendly and provides a green LED indicator for Status and a blue LED indicator for talk back. 1.75" W x 4.3125" H x .375" D (44.5 x 63.5 x 63.5 mm)

Wall Plate not included.
5100-114458: White 858
5100-114465: Almond 858
5100-117923: Bone 858
5100-117930: Black 858
5100-117947: Brown 858
 Shipping Weight 2 oz (57 g)



SaphIR In-Wall Receiver Kit

Kit includes our 858 in-wall IR receiver, 857 connection block, 846C power supply and (2) 1584.1 dual IR emitters.

Wall Plate not included.
5100-116308: White IRK-1
5100-116315: Almond IRK-1
 Shipping Weight 1.5 lbs (.68 kg)



SaphIR Plasma-Friendly In-Wall IR receiver

Designed for Home Theater applications which use Plasma screens.

Wall Plate not included.
5100-521478: White 858P
5100-521423: Almond 858P
5100-521454: Bone 858P
5100-521430: Black 858P
5100-521461: Brown 858P
 Shipping Weight 2 oz (57 g)



SaphIR Plasma-Friendly In-Wall Receiver kit

Includes our 858 in-wall IR receiver, 857 connection block, 846C power supply and (2) 1584.1 dual IR emitters.

Wall Plate not included.
5100-526440: White IRK-1P
5100-526695: Almond IRK-1P
 Shipping Weight 1.5 lbs (.68 kg)

SaphIR Connecting Blocks



SaphIR wall-mounted connecting block

Front panel has 4 output jacks for IR emitters, an input jack for a system connection and an input jack for IR system power. A terminal block at the rear of the IRB-6 accepts connections from remotely located IR receivers. Single-gang box or p-ring. Uses standard Decora cover plates. (Available in white only) 1.4375" W x 2.625" H x 1.625" D (36.6 x 66.7 x 41.3 mm)

Wall Plate not included.
5100-113338: IRB-6
 Shipping Weight 6 oz (.2kg)



SaphIR connecting block

IR Receiver, 6 emitters, a 12 volt power supply and a 12V Status power supply. LED's indicate power status and IR activity. 3.25" W x 1.85" H x 1" D (83 x 47 x 25 mm)

5100-115455: 857
 Shipping Weight 4 oz (113 g)

SaphIR Connecting Block Kit

Includes our 857 connecting block and 846C power supply. Select the other components you need to complete your installation from our comprehensive SaphIR product line.

5100-521522: IRJ-3
 Shipping Weight 1 lbs (.5kg)

SaphIR Power Supplies



12 Volt, 300mA Power Supply

6 foot cord terminating in 2.1mm coaxial plug. 110VAC
2" W x 2.375" H x 1.625" D
(50.8 x 60.4 x 41.3 mm)

5100-480034 846C
Shipping Weight 6 oz (.2 kg)



12 Volt, 1000mA Power Supply

May be used to drive up to 4 SaphIR K2 Keypads. 6 foot cord terminating in 2.1mm coaxial plug. 110VAC
2.1875" W x 2.875" H x 2.0625" D (55.7 x 73.1 x 52.4 mm)

6300-111075 1201A
Shipping Weight 10 oz (.28 kg)

SaphIR Connecting Blocks



SaphIR Connection Terminal

IRB-1 is an effective way to connect an IR receiver to an IR control system. It provides a single jack in the front panel for the IR receiver connection and screw terminals at the rear for the in-wall IR wiring. Mounts in a single gang junction box or p-ring and uses standard Decora cover plates. (Available in white only) 1.4375" W x 2.625" H x 1.625" D (36.6 x 66.7 x 41.3 mm)

Wall plate and speakers not included.

5100-113321 IRB-1
Shipping Weight 6 oz (.2kg)



Receiver extension

50 foot cable with stereo male/female 3.5mm mini connectors for extending receivers. 1.4375" W x 2.625" H (36.6 x 66.7 mm)

5200-480065: 900
Shipping Weight 4 oz (113 g)



SaphIR In-Wall IR receiver

Add-on for ALTx and LPTx volume controls and adds the capability to receive IR commands to an existing speaker volume control wall plate. The receiver is CFL-friendly and provides an LED indicator for system status.

5100-115820: White DP-WIR
5100-115806: Almond DP-WIR
5100-115813: Bone DP-WIR
5100-118807: Black DP-WIR
5100-118791: Brown DP-WIR
Shipping Weight 2 oz (57 g)



4 conductor, 22 gauge cable

2 pair twisted w/shield, 19/34 tinned copper, PVC jacket, temp. Rating 75° C, UL Type CL3, White jacket. 1000 foot pull-box only. Conducts sensitive IR signals and shields them from outside noise.

9000-115240: AW2260AB

Miscellaneous



Universal Learning/Programmable IR In-Wall Keypad

Source component library of over 1,000 devices, built-in IR receiver with talk back LED, display backlight switchable to green or amber. Controls up to 8 A/V components. Requires 1201A power supply.

Requires programing cable.
2500-121036

2500-528248: White/Almond K2
Shipping Weight 1.25 lbs (.57 kg)



UNO-S2/K2 Conversion kit

(1) Mounting plate,
(1) Insert Plate,
(1) Cover plate.

2500-528156: White
2500-528163: Almond
2500-528118: Bone
2500-528125: Black
2500-528132: Brown
2500-520531: Brsh. Aluminum
Shipping Weight 2 oz (.1kg)



Remote Control

Complete solution for all of your remote control requirements. It is designed to operate source devices and Russound audio system keypads. Controls up to eight devices.

1210-524196: SRC2
Shipping Weight 5 oz. (.11 kg)



Download your FREE EZpro software from www.russound.com

SaphIR EZpro

Custom programming software allows the installer to quickly and easily setup many complex parameters for the SaphIR K2 keypad. Save and use programming for new jobs and to quickly recall and edit previous installations — saving time and money. Logical menus and a familiar interface make it user friendly. **Requires programming cable. 2500-121036**

PlateMate Home theater



Home Theater Plate

For 5.1, 6.1 or 7.1 surround sound (14) 5-way binding posts (2) RCA-F connectors on heavy-duty molded plate. (2) powered subwoofers.

7101-524110: HTP-2

Shipping Weight 8 oz. (.23 kg)



Home Theater Plate

(12) 5-way binding posts, 7/16" hex head, (2) RCA-F connectors on double-gang standard plate. Hookup for passive or powered subwoofer.

7101-121807 : HTP-1

Shipping Weight 7 oz. (.2 kg)

PlateMate Spring Loaded Connectors



SL-2P

Crimp-on rear terminal on a standard plate.

7101-803017: White



SL-4P

Crimp-on rear terminal on a standard plate.

7101-803079: White

PlateMate 5-way Binding Post Connectors



BP1D

(2) PM-BP (1 Red and 1 Black)
(1) ACRP-26 Decora plate.

7101-850240



BP10D

(4) PM-BP (2 Red and 2 Black)
(1) ACRP-26 Decora plate.

7101-850486

PlateMate-6 packs



PM-MOD1S

Single gang plate with (1) modular hole. 6 pcs. Per box.

7104-112027: White

7104-112256: Bone

7104-120251: Almond



PM-MOD2S

Single gang plate with (2) modular holes. 6 pcs. Per box.

7104-112034: White

7104-112263: Bone

7104-120275: Almond



PM-MOD3S

Single gang plate with (3) modular hole. 6 pcs. Per box.

7104-112041: White

7104-112270: Bone

7104-120299: Almond



PM-MOD4S

Single gang plate with (4) modular holes. 6 pcs. Per box.

7104-113345: White

7104-113352: Bone

7104-120305: Almond



PM-MOD1D

Decora insert with (1) modular holes. 6 pcs per box.

7104-112058: White

7104-112287: Bone

7104-120244: Almond



PM-MOD2D

Decora insert with (2) modular holes. 6 pcs. Per box.

7104-112065: White

7104-112294: Bone

7104-120268: Almond



PM-MOD3D

Decora insert with (2) hex and (1) modular holes. 6 Pcs Per Box

7104-112072: White

7104-112300: Bone

7104-120282: Almond



PM-MOD4D

Decora insert with (4) modular holes. 6 pcs. Per box.

7104-520471: White

7104-520488: Bone

7104-520495: Almond

PlateMate Modular Plates 6-packs



PM-1S
1 hex hole. 6 pcs. Per box.
7104-111907 White
7104-112133 Bone



PM-2S
2 hex hole. 6 pcs. Per box.
Not used with PM-DB
7104-111914 White
7104-112140 Bone



PM-3S
3 hex hole. 6 pcs. Per box.
Not used with PM-DB
7104-111921 White
7104-112157 Bone



PM-4S
4 hex hole. 6 pcs. Per box.
Not used with PM-DB
7104-111938 White
7104-112164 Bone



PM-6S*
6 hex holes. 6 pcs. Per box.
Not used with PM-DB.
7104-111945 White
7104-112171 Bone



PM-8S*
Standard single gang plate
with 8 hex holes. 6 pcs. Per
box. **Not used with PM-DB.**
7104-111952 White
7104-112188 Bone



PM-1D
Decora insert with 1 hex hole.
6 pcs. Per box.
7104-111969 White
7104-112331 Almond
7104-112195 Bone



PM-2D
Decora insert with 2 hex hole.
6 pcs. Per box. **Not used
with PM-DB**
7104-111976 White
7104-112348 Almond
7104-112201 Bone



PM-3D
Decora insert with 3 hex hole.
6 pcs. Per box. **Not used
with PM-DB**
7104-111983 White
7104-112355 Almond
7104-112218 Bone



PM-4D
Decora insert with 4 hex hole.
6 pcs. Per box. **Not used
with PM-DB**
7104-111990 White
7104-112362 Almond
7104-112225 Bone



PM-6D*
Decora insert with 6 hex holes.
6 pcs. Box. **Not used with
PM-DB.**
7104-112003 White
7104-112379 Almond
7104-112232 Bone



PM-8D*
Decora insert with 8 hex holes.
6 pcs. Per box.
Not used with PM-DB.
7104-112010 White
7104-112386 Almond
7104-112249 Bone

PlateMate Decora Wall Plates



ACRP-26
Pack of 25.
7105-451003 White
7105-451041 Almond
7105-451010 Bone
7105-451027 Black
7105-451058 Brown
Shipping 1 lbs 4oz (.58kg)



ACRP-262
Pack of 25
7105-451065 White
7105-113802 Almond
7105-451072 Bone
7105-451089 Black
7105-114700 Brown
Shipping Weight 2 oz (.05 kg)



ACRP-263
Sold Individually.
7105-451126 White
7105-115691 Almond
7105-451133 Bone
7105-119514 Black
7105-115622 Brown
Shipping Weight 2 oz (.05 kg)

PlateMate Decora Wall Plates



ACRP-264
Sold Individually.
7105-451188 White
7105-119521 Almond
7105-451195 Bone
7105-451201 Black
7105-119538 Brown
Shipping Weight 2 oz (.05 kg)



ACRP-265
Sold Individually.
7105-451249 White
7105-451287 Almond
7105-451256 Bone
7105-119545 Black
7105-119552 Brown
Shipping Weight 3 oz (.09 kg)



ACRP-266
Sold Individually
7105-451300 White
7105-119569 Almond
7105-451317 Bone
7105-115707 Black
7105-114717 Brown
Shipping Weight 3 oz (.09 kg)



SWP-1
7106-115615 White
7106-114267 Almond
7106-526992 Black
 Shipping Weight 2oz (.071kg)



SWP-2
7106-114274 White
7106-114281 Almond
7106-531040 Black
 Shipping Weight 2oz (.071kg)



SWP-S21
 Two gang + single gang
7106-526831 White
7106-528439 Almond
7106-528477 Bone
7106-528491 Black
7106-528484 Brown
 Shipping Weight 2oz (.071kg)




SWP-3
7106-115301 White
7106-115431 Almond
 Shipping Weight 3oz (.10kg)



SWP-4
7106-115677 White
7106-115448 Almond
 Shipping Weight 3.5oz (.11kg)




Stainless Steel
7106-526480: SWP-1.SS
 Shipping Weight 2oz (.071kg)




Stainless Steel
7106-526497: SWP-2.SS
 Shipping Weight 2oz (.071kg)



Brushed Aluminum
2500-520531: Brh.. Aluminum
 Shipping Weight 2oz (.071kg)



Stainless Steel
7106-526503: SWP-3.SS
 Shipping Weight 3.5oz (.11kg)

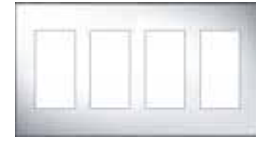

Stainless Steel
7106-526510: SWP-4.SS
 Shipping Weight 3.5oz (.11kg)

Plastic Work Boxes—New Construction



Single gang, 18 inches³ Work box
 Captive mounting nails. Two Quick Click® entries for each end. 2.0625" W x 2.875" H x 3.125" D (52.4 x 73.1 x 79.4 mm). 4oz (.1kg)
7200-450075: S1-18-R

Single gang, 22 inches³ Work box
 Single gang captive mounting nails. Two Quick Click® entries for each end. 2.0625" W x 2.9375" H x 3.4375" D (52.4 x 74.7 x 87.4 mm).
7200-114694: S1-22-R
 Shipping weight 5oz (.1kg)

Double gang Work box
 Double gang captive mounting nails. Four Quick Click® entries for each end. 3.8125" W x 2.9375" H x 3.0625" D (96.9 x 74.7 x 77.8 mm).
7200-450082: S2-35-RAC
 Shipping Weight 5oz (.1kg)

Triple gang Work box
 Triple gang captive mounting nails. Six Auto Clamps® for each end. 5.875" W x 2.9375" H x 3.125" D (149.3 x 74.7 x 79.4 mm).
7200-450099: S3-54-RAC
 Shipping weight 7oz (.2kg)

UL Classified and ICBO Recognized. Quick Click® and Auto Clamp are registered trademarks of the Pass and Seymour/ Legrand Corporation. Note: All Work Boxes must be purchased in 10 piece lots.


Plastic Work Boxes – Retrofit



S1-18-W
 Single gang with two Auto Clamps®. Two Quick Click® entries for each end. 2.0625" W x 2.875" H x 3.125" D (52.4 x 73.1 x 79.4 cm)
7200-450051: S1-18-W
 Shipping Weight 4oz (.1kg)

S2-32-W
 Double gang with four Auto Clamps®. Four Quick Click® entries for each end. 3.875" W x 2.9375" H x 3.125" D (98.5 x 74.7 x 79.4 cm)
7200-450068: S2-32-W
 Shipping Weight 5oz (.1kg)

P-Rings – Retrofit




1 gang p-ring
 2.5" W x 4.25" H x 1.5" D (63.5 x 108 x 38.1 mm)
7200-119576: CADMP1P
 Shipping Weight 1oz (.05kg)


2 gang p-ring
 4.25" W x 4.25" H x 1.5" D (108 x 108 x 38.1 mm)
7200-119583: CADMPAL2
 Shipping Weight 1oz (.05kg)

3/4 (cut-away partitions) gang p-ring
 7.875" W x 4.25" H x 1.5" D (201 x 108 x 38.1 mm)
7200-119590: CADMP34P
 Shipping Weight 1oz (.05kg)


Misc... Workboxes

**UK Single-Gang Metal Workbox**


47 mm deep metal UK style back box for use with A-KP-EU
7200-521492

**Grey Single gang, surface mount Workbox**

Allows single gang devices to be mounted on wall.
 53mm deep. **Call for special order in White finish.**
7200-521133

**Double Gang Arlington Ring**

Low voltage double gang ring style
 mounting P-ring.
7200-521493

**Grey Double gang, surface mount Workbox**

Allows double gang devices to be mounted on wall.
 53mm deep. **Call for special order in White finish.**
7200-521133

Outdoor Thermoplastic Covers

**Vertical, Single Gang Thermoplastic Cover**

Self-closing cover with 3/8" gasket and 2 mounting screws.
Mounts to single-gang box not included.
 3.0625" W x 4.8125" H x 1.1875" D (77.8 x 122.4 x 30.2 mm)
9000-450020: WPB 37-23
 Shipping Weight 9oz (.3kg)

**Clear, Double Gang Thermoplastic Cover**

7200-521157: E9U2CRN
 Surface mount grey weather proof outdoor cover. Allows
 double gang device to be mounted outside.
Workbox not included.

Vertical, Single Gang Thermoplastic Cover

Same as above except mounts to flat surface with 4 screws.
 3.0625" W x 4.8125" H x 1.1875" D (77.8 x 122.3 x 30.2 mm)
9000-450037: WPB 37-23FS
 Shipping Weight 9oz (.3kg)

**Grey, Double Gang Thermoplastic Cover**

7200-521164: E9U2GRN
 Double gang, surface mount grey weather proof outdoor
 cover. Allows double gang device to be mounted outside.
Workbox not included.

Horizontal, Single Gang Thermoplastic Cover

Horizontal self-closing cover with 3/32" gasket and 2 mount-
 ing screws. Mounts to single-gang box.
 4.9375" W x 2.875" H x 1.6875" D (125.5 x 73.1 x 42.9 mm)
9000-450006: WPB 37-03
 Shipping Weight 9oz (.3kg)

Horizontal, Single Gang Thermoplastic Cover

Same as above except mounts to flat surface with 4 screws.
 4.9375" W x 2.875" H x 1.75" D (125.5 x 73.1 x 44.5 mm)
9000-450013: WPB 37-03FS
 Shipping Weight 9oz (.3kg)



MOD-VB

Premium gold plated RCA. Converts video signal from RCA to CAT-5 cable. Sold in pairs.

7103-121876

Shipping Weight 2 oz (.05 kg)



MOD-F2F

Premium gold plated female F to F connectors with modular bracket. 12 Pcs. Per box. For use with PM-MOD wall plates.

7103-111358: White

7103-111587: Bone

7103-120336: Almond

Shipping Weight 5 oz (.1 kg)



MOD-RJ45CAT5

RJ-45 modular telephone Jack with CAT-5 Connector. Gold plated. 6 Pcs. Per Box. For Use With PM-MOD wallplates

7103-111365: White

7103-111594: Bone

7103-120312: Almond

Shipping Weight 2 oz (.05 kg)



MOD-RJ11

RJ11 Telephone Jack (6 Wire) gold plated. 6 Pcs. Per box for use with PM-MOD wall plates.

7103-111372: White

7103-111600: Bone

7103-120329: Almond

Shipping Weight 2 oz (.05 kg)



PM-BP

Premium heavy duty gold plate 5-way binding posts. 12 Pair Per Box. (12 Red and 12 Black)

7103-111822

Shipping Weight 9 oz (.25 kg)



PM-BJ

Premium gold plated Banana Jacks. 12 Pair Per Box. (12 Red and 12 Black)

7103-111839

Shipping Weight 9 oz (.25 kg)



PM-SB

Premium gold plated banana plugs with threaded insert.

6 Pair per box.

(6 Red and 6 Black)

7103-115523

Shipping Weight 4.5 oz (.1 kg)



PM-DB

Premium gold plated banana plugs with threaded insert. 6 Pcs. Per Box.

7103-112423

Shipping Weight 6 oz (.17 kg)



PM-RCA

Premium gold plated RCA jack-rear solder tab. 12 Pcs. Per box.

7103-112317: Yellow

7103-112089: White

7103-111846: Red

Shipping Weight 3.5 oz (.1 kg)



PM-RCA2


Premium gold plated RCA Jack to RCA jack. 12 Pcs. Per Box

7103-112416: Yellow

7103-112409: White

7103-112393: Red

Shipping Weight 3.5 oz (.1 kg)



PM-RCAF

Premium Gold Plated RCA Jack to F-connectors. 12 Pcs. Per Box

7103-112324: Yellow

7103-112096: White

7103-111853: Red

7103-521355: Green

7103-521348: Blue

Shipping Weight 3 oz (.09 kg)



PM-FF

Premium Gold Plated Female F to F connectors. 12 Pcs. Per Box.

7103-111860

Shipping Weight 3.5 oz (.1 kg)

System Accessories



AC 12-Volt Trigger


120 VAC - 12-Volt DC triggered outlet with resettable circuit breaker. Switches up to 10 amps. 3.75" W x 2" H x 5" D (9.5 x 5.1 x 12.7 cm)

Not for sale in countries with RoHS requirements

9500-115592: ACT-1 US

9500-114298: ACT-1 UK

Shipping Weight 1 lbs. (.45 kg)




Speaker to line-level adapter

Recommended for use with CAA66 and CAM6.6 to obtain line level outputs for zones without pre-amp outputs. Color-coded detachable 14-gauge snap connectors. 3.375" W x 1" H x 2.5" D (8.6 x 2.6 x 6.4 cm)

9500-200891: ADP-1.2

Shipping Weight 14 oz (.4 kg)



110 Patch Plug

Two pieces, sold in quantities of 10 per pack.

8200-526756: S110P4



Speaker relay module

Share speakers between controllers and home theater. Add 12-VDC automatic A/B switching, speaker level, between CA amplifier and local amplifier. 1.3125" W x 2.5" H x 1.875" D (33.5 x 63.5 x 48 mm) **Wall plates not included with keypads.**

1200-115585: White SRM-2.1

1200-114021: Almond SRM-2.1

Shipping Weight 4 oz (.11 kg)



Doorbell Interface Module

Provides 12VDC triggered output for muting multiroom audio systems. 3.375" W x .625" H x 1.6875" D (85.8 x 15.9 x 42.9 mm)

Not for sale in countries with RoHS requirements

9500-113116: DIM-1

Shipping Weight 6 oz (.2 kg)

Data and Speaker Cable



2 conductor, 16 gauge speaker cable

Unshielded, 26/30 strands bare copper, .024 nominal PVC jacket, temp. rating 75° C, UL type CL3, Light Blue Jacket. 1000 foot pull-box only.

9000-119316: AW162CL3



4 pair twisted, 24 gauge, CAT-5E cable

Solid copper, PVC jacket, telephone/data grade/ISDN. Zipcord with 4 conductor, 16 gauge speaker cable. 500 foot spool. PINK jacket.

9000-121838: AW164C5



4 conductor, 22 gauge signal/data cable

2 pair twisted w/shield, 19/34 tinned copper, PVC jacket, temp. Rating 75° C, UL Type CL3, White jacket. 1000 foot pull-box only. Conducts sensitive IR signals and shields them from outside noise.

9000-115240: AW2260AB



8 conductor, 24 gauge CAT-5E cable

4 pair twisted, solid copper, PVC jacket, telephone/data grade/ISDN, GRAY jacket. 1000 Foot pull-box only.

9000-119323: AWCAT5



4 conductor, 16 gauge speaker cable

Unshielded, 26/30 strands bare copper, .024 nominal PVC jacket, temp. rating 75° C, UL Type CL3, Yellow Jacket. 500 foot pull-box only.

9000-460067: AW164CL3



PRODUCT CATEGORY WARRANTY

ONE YEAR LIMITED WARRANTY:

SMS3 SMART MEDIA SERVER

TWO YEAR LIMITED WARRANTY:

IBRIDGE DOCK, IBRIDGE POWER DOCK, IBRIDGE BAY

SMART TUNERS (ST2, ST2S, ST2-XM, ST2-XM2)

COLLAGE (CAK1, CMM1)

C-SERIES (MCA-C5, MDK-C5)

CAV/CAM (CAV6.6, CAM6.6, UNO-S2, UNO-S1, UNO-TS2, UNO-TS2D)

CAA/CAS (CAS44, CAA66, KP4, KP6, KPL, KPSC, SRM-2.1, ADP-1)

CA4 (CA4, CA4-WP, CA4-KP)

A-BUS (A-KP2, A-H1,A-H4, A-H4P, A-H4D, A-H2, A-H484, A-PS, A-LC2, A-LRC1, A-VC2, A-H4DX, A-OM)

COMPOINT (ISK1, ISK2, ISK3, ISSP, ISH1, ISDR1, ISPS)

R-SERIES AMPLIFIERS (R235LS, R290DS, R850MC, R1250MC)

VIDEO DISTRIBUTION (CRX, CTX, HDRX, HDTX, VM1, WMR1, HDMIX)

SAPHIR PRODUCTS

ACCESSORIES (ACT-1,EZB, ADP-1.2, DIM-1, EXB-1SC, EXB-2SC, SA-ZX3, SRC1, SCR2, SRM-2.1)

FIVE YEAR LIMITED WARRANTY:

RATIO, OUTBACK, AND OUTBACK ROCK SPEAKERS

TEN YEAR LIMITED WARRANTY:

SPEAKER SELECTORS AND IMPEDANCE MATCHING DEVICES (SS, PRO, SDB, AB, WCN-12, WB-1, AX-6)

LIMITED LIFETIME WARRANTY :

VOLUME CONTROLS (ALTX, LPTX, WALTX2, TBL)

ACCLAIM 5 AND 7 SERIES SPEAKERS

FLEXBOX SPEAKER BACK BOXES

RETURNS AND WARRANTY POLICY

Russound sells products only through authorized Dealers and Distributors to ensure that customers obtain proper support and service. Any Russound product purchased from an unauthorized dealer or other source, including retailers, mail order sellers and online sellers will not be honored or serviced under existing Russound warranty policy. Any sale of products by an unauthorized source or other manner not authorized by Russound shall void the warranty on the applicable product.

Returns must be authorized and be accompanied with an R.A. number and a copy of the proof of purchase.

A 15% restocking charge may apply. Any returns for repair found to be non-defective may result in a fifty dollar minimum charge. Any product returned without a Return Authorization Number will be returned at dealer expense.

For further warranty information, see Russound product manuals.

Prices and specifications subject to change without notice. Russound is not responsible for typographical errors. E. & O. E. Decora® is a registered trademark of Leviton Corporation.

A-BUS® is a registered trademark of LeisureTech Pty Ltd Australia. iPod is a trademark of Apple, Inc., registered in the U.S. and other countries.

Russound

5 Forbes Road, Newmarket, NH 03857, USA

www.russound.com | Tel +1.603.659.5170 | Fax 603.659.5388

Contact: sales@russound.com

03.12.09

International Dealer Catalog Literature Number – LR9910-0006

The Russound Pledge

Speak to a real person

We believe in personal attention and have real people to answer your calls during business hours. And Russounders don't hide behind voice mail.

Answers and solutions

We promise to do our utmost to satisfy your needs on the first contact or with a return response that very day. We make it our priority to answer your question and resolve issues in a prompt and courteous manner.

Inventory

We offer a complete product line and maintain a deep inventory of items. In fact, 97% of all orders are shipped complete.

Same day shipping

Orders placed by 2:00 PM EST will be shipped that day. The shipping status with tracking number will be confirmed to you via e-mail that same day. (International shipments do not apply).

Knowledge

Knowledgeable Sales personnel that are fast, fun and friendly to work with. Tech Support The best tech support in the business, from 8:30 am to 7:00 PM (EST), Monday through Friday.

Education

Dedicated professional regional trainers and comprehensive educational programs.

E-friendly

E-mail us or visit our website up-to-date sales and technical information 24/7 at www.Russound.com.

Product Integrity

Russound backs all of its products with quality and a no nonsense warranty. We'll do whatever it takes to make a situation right. For extra peace of mind, Russound obtains all applicable safety approvals for our products, even when they're not required.

Courtesy

We treat everyone with courtesy, dignity and respect. And that means everyone.

Our primary goal is to establish a long-lasting, mutually beneficial relationship.

